

MOTOR DATA SHEET DS_SPM_09/23

GENERAL CHARACTERISTICS

Frame size	90
Type of construction	B14
Weight [kg]	35.6
Moment of Inertia [10 ⁻⁴ kgm ²]	0.0107
Degree of protection	IP69K
Direction of rotation	Both
Method of cooling	IC410
Duty	S1
Insulation class	F
Ambient temperature [°C]	-15 / +40
Dielectric Strength Test IEC34-1	2kV 1s

NAMEPLATE DATA and CONNECTION DIAGRAM

PREMIUM MOTOR S.S.316L

SPM 90S6 IMB14

Ins.Cl.F Amb. max 40°C IC411 Duty S1 IP69K

DE 6206.2Z NDE 6206.2Z Weight 35.6 Kg

Hz 50 Δ/Y 230/400V Hz 60 Δ/Y 277/480V

1.1 kW 4.2 / 2.4 A 1.5 HP 3.8 / 2.2 A




950 min⁻¹ cosφ 0.78 1140 min⁻¹ PF. 80 %

EFF(100%) 84.5 % NEMA DES.- CODE K


INVERTER DUTY

PWM SPEED RANGE 2.5:1: CT / 10:1 VT

Acceptable
for field wiring



**INVERTER DUTY
WASHDOWN
HYGIENIC
S.S. 316L
IP69K**

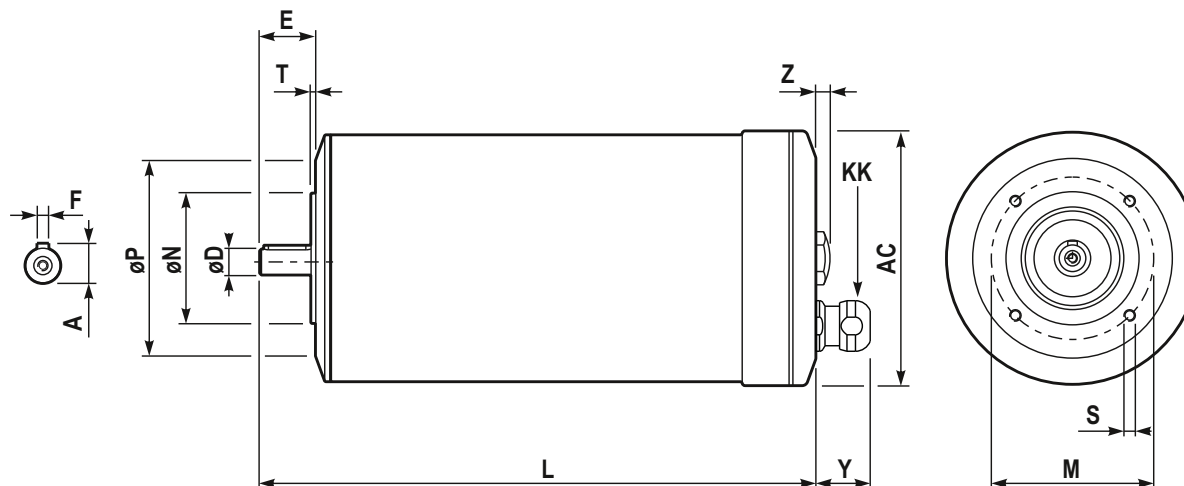

DIMENSIONS

AC	Ø181	M	Ø115
Y	22.5	ØN	Ø95 j6
L	372	ØP	Ø140
ØD	24 j6 M8	T	3
E	50	n x S	4 M8x16
F	8	Z	7.4
A	27	KK ⁽¹⁾	M20 x 1.5 cable gland clamping range Ø9-12 mm

BEARINGS

DE	6206.2Z
NDE	6206.2Z

(1) Hygienic cablegland, EHEDG certified
Stainless steel, IP69K

SPECIAL EXECUTION AND ACCESSORIES

	code
-	
-	
-	