



MOTOR DATA SHEET DS_APM_06/23

GENERAL CHARACTERISTICS

Frame size	63
Type of construction	B14
Weight [kg]	8.7
Moment of Inertia [kgm ²]	0.0016
Degree of protection	IP69K
Direction of rotation	Both
Method of cooling	IC410
Duty	S1
Insulation class	F
Ambient temperature [°C]	-15 / +40
Dielectric Strength Test	2kV 1s

NAMEPLATE DATA and CONNECTION DIAGRAM

ALUMINUM PREMIUM MOTOR

APM 63 B14

Ins.Cl.F Amb. max 40°C IC411 Duty S1

DE 6203.2Z NDE 6203.2Z Weight 8.7 Kg

Hz 50 Δ/Y 230/400V Hz 60 Δ/Y 264/460V


0.18 kW 0.8 / 0.5 A 0.25 HP 0.8 / 0.5 A

1446 min⁻¹ cosφ 0.76 1752 min⁻¹ PF. 71%

EFF(100%) 77.3 % NEMA DES.- CODE K

INVERTER DUTY

PWM SPEED RANGE 2.5:1: CT / 10:1 VT

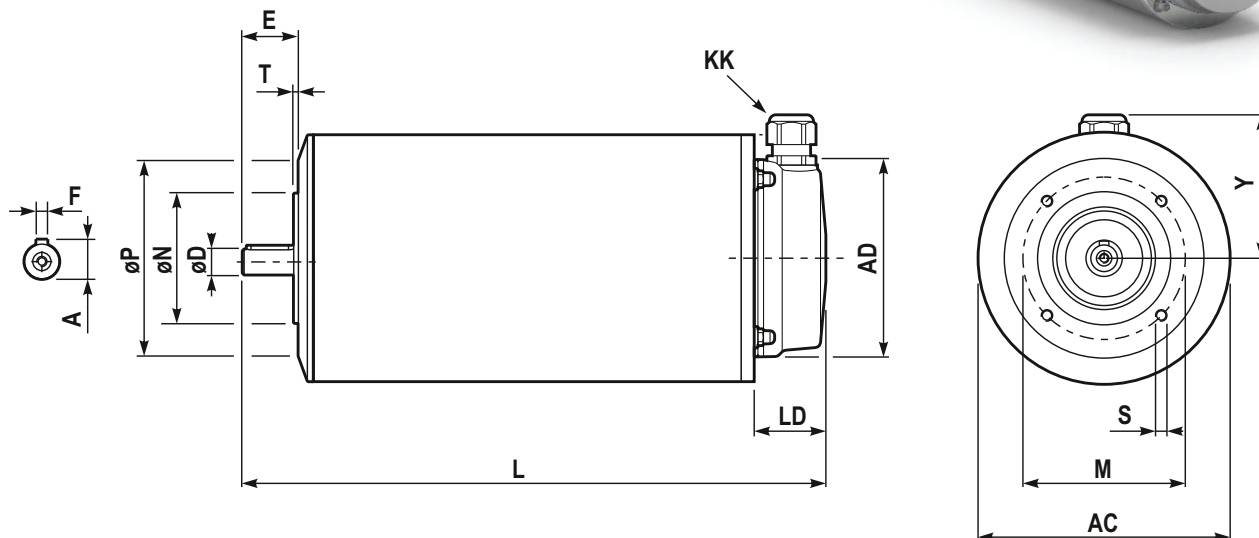

DIMENSIONS

AC	Ø133	LD	38.5
AD	Ø106	M	75
Y	78	ØN j6	Ø60
L	264	ØP	Ø90
ØD j6	Ø11	T	2.5
E	23	n x S	M5x13
F	4	KK ⁽¹⁾	M20x1.5
A	12.5		

BEARINGS

DE	6203.2Z
NDE	6203.2Z

SPECIAL EXECUTION AND ACCESSORIES

	code
-	
-	
-	