



MOTOR DATA SHEET

DS_APM_06/23

GENERAL CHARACTERISTICS

Frame size	63
Type of construction	B14
Weight [kg]	7.9
Moment of Inertia [kgm ²]	0.0014
Degree of protection	IP69K
Direction of rotation	Both
Method of cooling	IC410
Duty	S1
Insulation class	F
Ambient temperature [°C]	-15 / +40
Dielectric Strength Test	2kV 1s

NAMEPLATE DATA and CONNECTION DIAGRAM

ALUMINUM PREMIUM MOTOR

APM 63 B14

Ins.Cl.F Amb. max 40°C IC411 Duty S1

DE 6203 C3 NDE 6203 C3 Weight 7.9 Kg

Hz 50 Δ/Y 230/400V Hz 60 Δ/Y 264/460V


0.12 kW 0.7 / 0.4 A 0.16 HP 0.7 / 0.4 A

1448 min⁻¹ cosφ 0.68 1755 min⁻¹ PF. 62%

EFF(100%) 75 % NEMA DES.- CODE K

INVERTER DUTY

PWM SPEED RANGE 2.5:1: CT / 10:1 VT

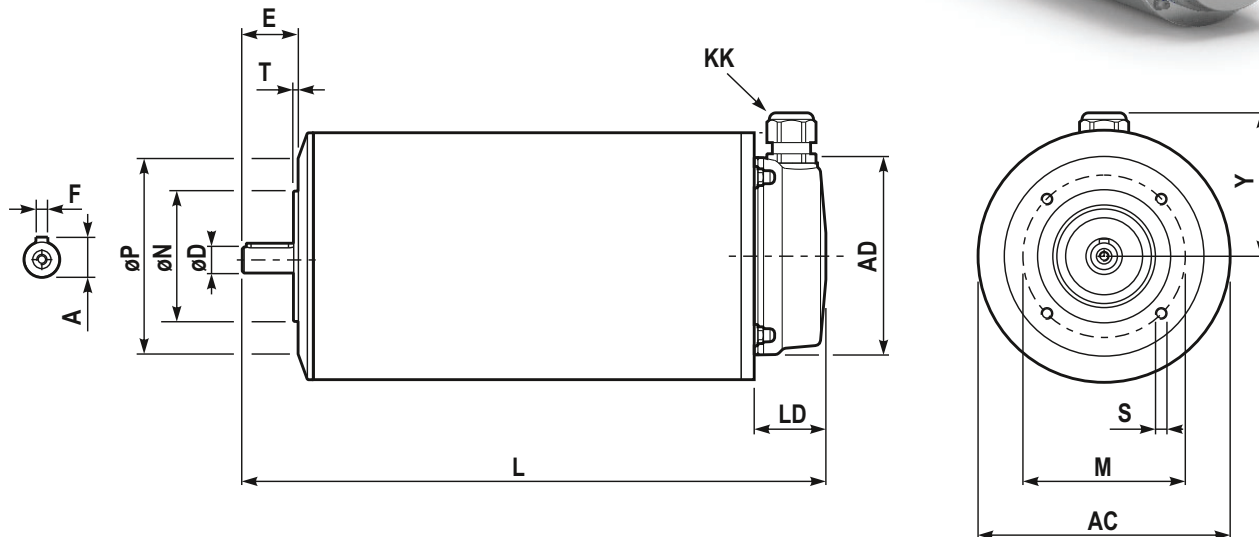

DIMENSIONS

AC	Ø133	LD	38.5
AD	Ø106	M	75
Y	78	ØN j6	Ø60
L	264	ØP	Ø90
ØD j6	Ø11	T	2.5
E	23	n x S	M5x13
F	4	KK ⁽¹⁾	M20x1.5
A	12.5		

BEARINGS

DE	6203 C3
NDE	6203 C3

SPECIAL EXECUTION AND ACCESSORIES

	code
-	
-	
-	