

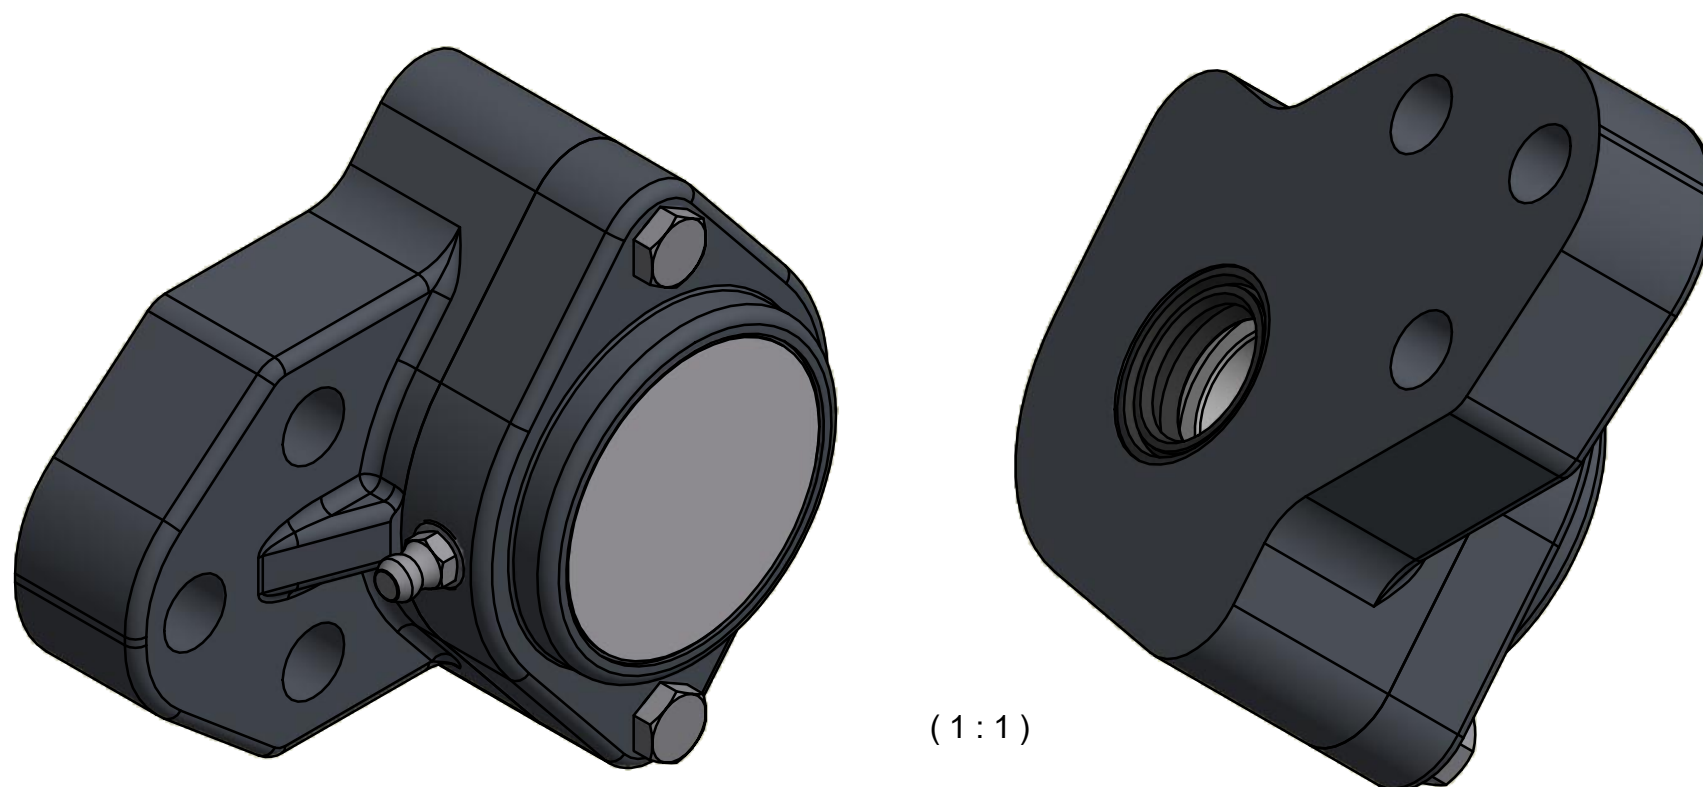
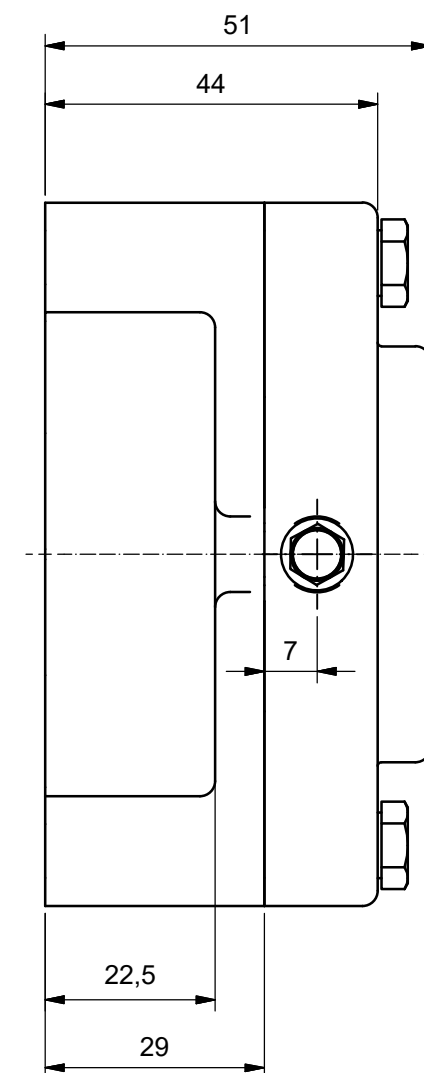
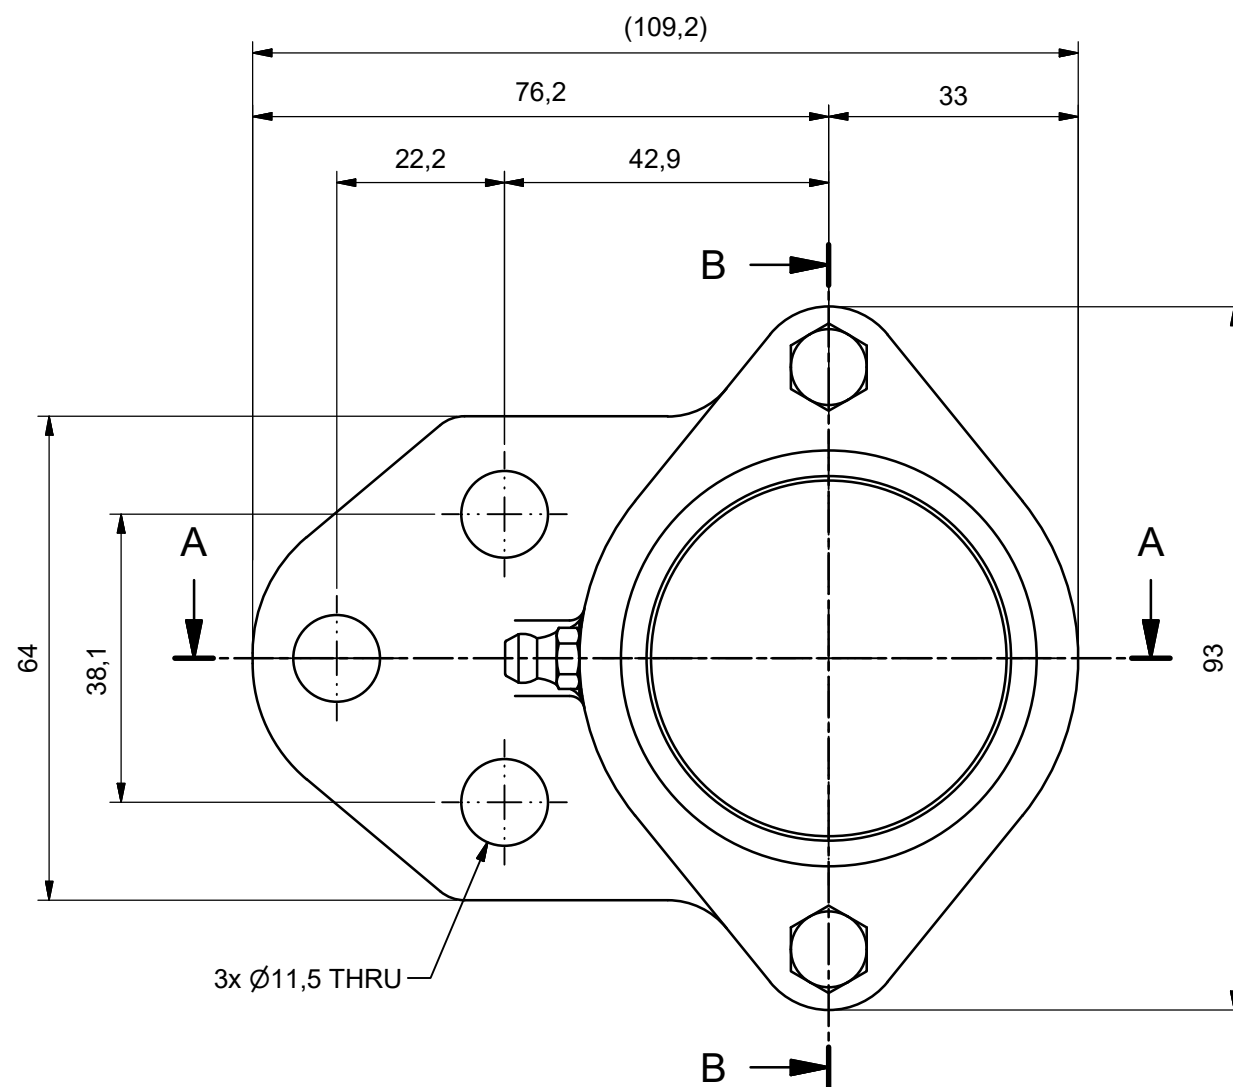



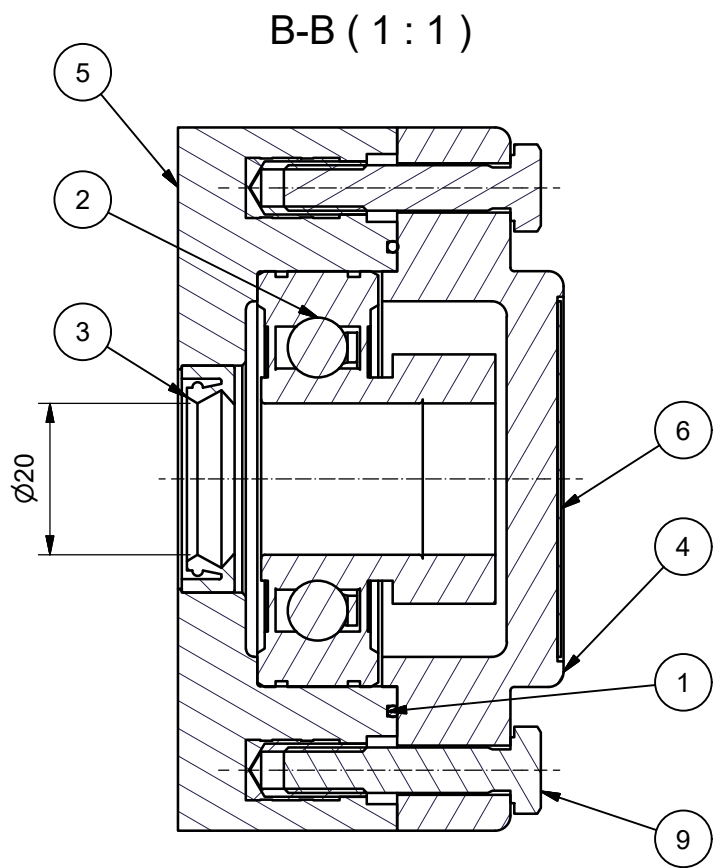


(1 : 1)

Materiale / Material:		bj-gear	
Format: A3		Tel.: +45 87 40 80 80 www.bj-gear.com	
Sign.: fje		Beskrivelse / Description:	
Date / Date: 24-04-2019		NG 20-F30 C, FLANGELEJE	
Vægt / Weight: 0,264 kg		LUKKET, KOMPLET	
Målforhold / Scale: 1 : 1		Tegn. nr. / Drawing id.:	
Standard:		NG20F30	
Ikke tolerancesatte mål iht. DS/ISO 2768-f. Skarpe kanter reffes. Non-toleranced measures acc. DS/ISO 2768-f. Deburrr sharp edges. Ovenstående gælder kun produktionstegninger. The above stated only applies production drawings.		Rev.: -	
		Side / Page: 1 / 2	

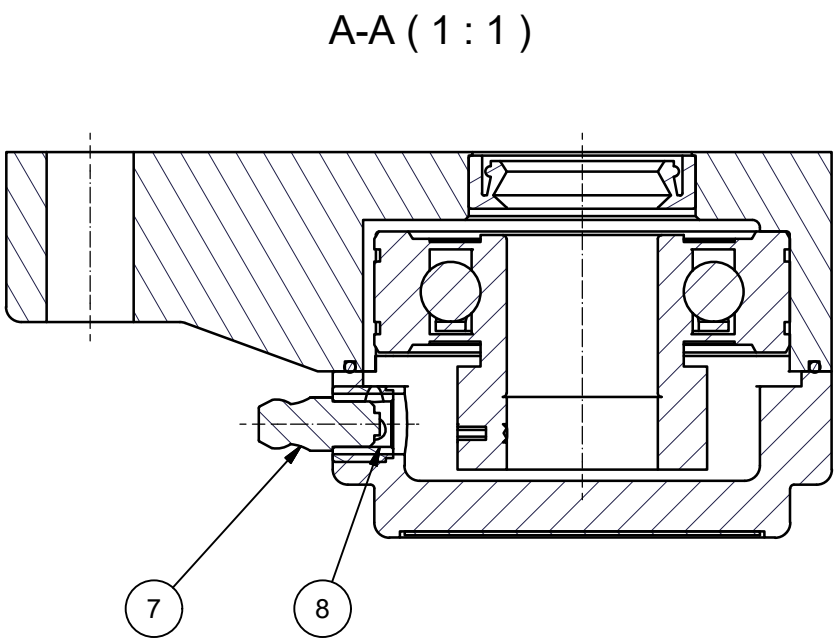

9	2	DIN 933-A2 M6X30 Rustfri sætskrue	KI820060
8	1	Forskruing M6/M10, L=8	KI820040
7	1	DIN 71412-A2 Smørenippel M6x1,0 SN	KI820010
1	1	NG O-ring snor i tromle, L=200	KI820005
6	1	NG Logo, DK 20 lukket	KI810010
5	1	NG 20-F3 Flangeleje	KI802420
4	1	NG 20-F3 Endedæksel lukket	KI802410
3	1	Olietætningsring Nitrill; 203007 CC	KI802070
2	1	NG PE leje ø20 incl. exentrick	KI802050
Pos.	Antal	Navn	Varenummer

Materiale / Material:		bj-gear	
u =  x =  y =  z = 		Format: A3	Tel.: +45 87 40 80 80 www.bj-gear.com
v =  w = 		Sign.: fje	NG 20-F30 C, FLANGELEJE
Indstikslibes		Date / Date: 24-04-2019	LUKKET, KOMPLET
U Ra 0.5 L Ra 0.3		Vægt / Weight: 0,264 kg	
U Ra 1.6 L Ra 0.3			
U Ra 18 L Ra 8			
Ikke tolerancesatte mål iht. DS/ISO 2768-f. Skarpe kanter reffes. Non-toleranced measures acc. DS/ISO 2768-f. Deburr sharp edges.		1 : 1	
Ovenstående gælder kun produktionstegninger. The above stated only applies production drawings.			
		Standard:	NG20F30
		Side / Page:	2 / 2