

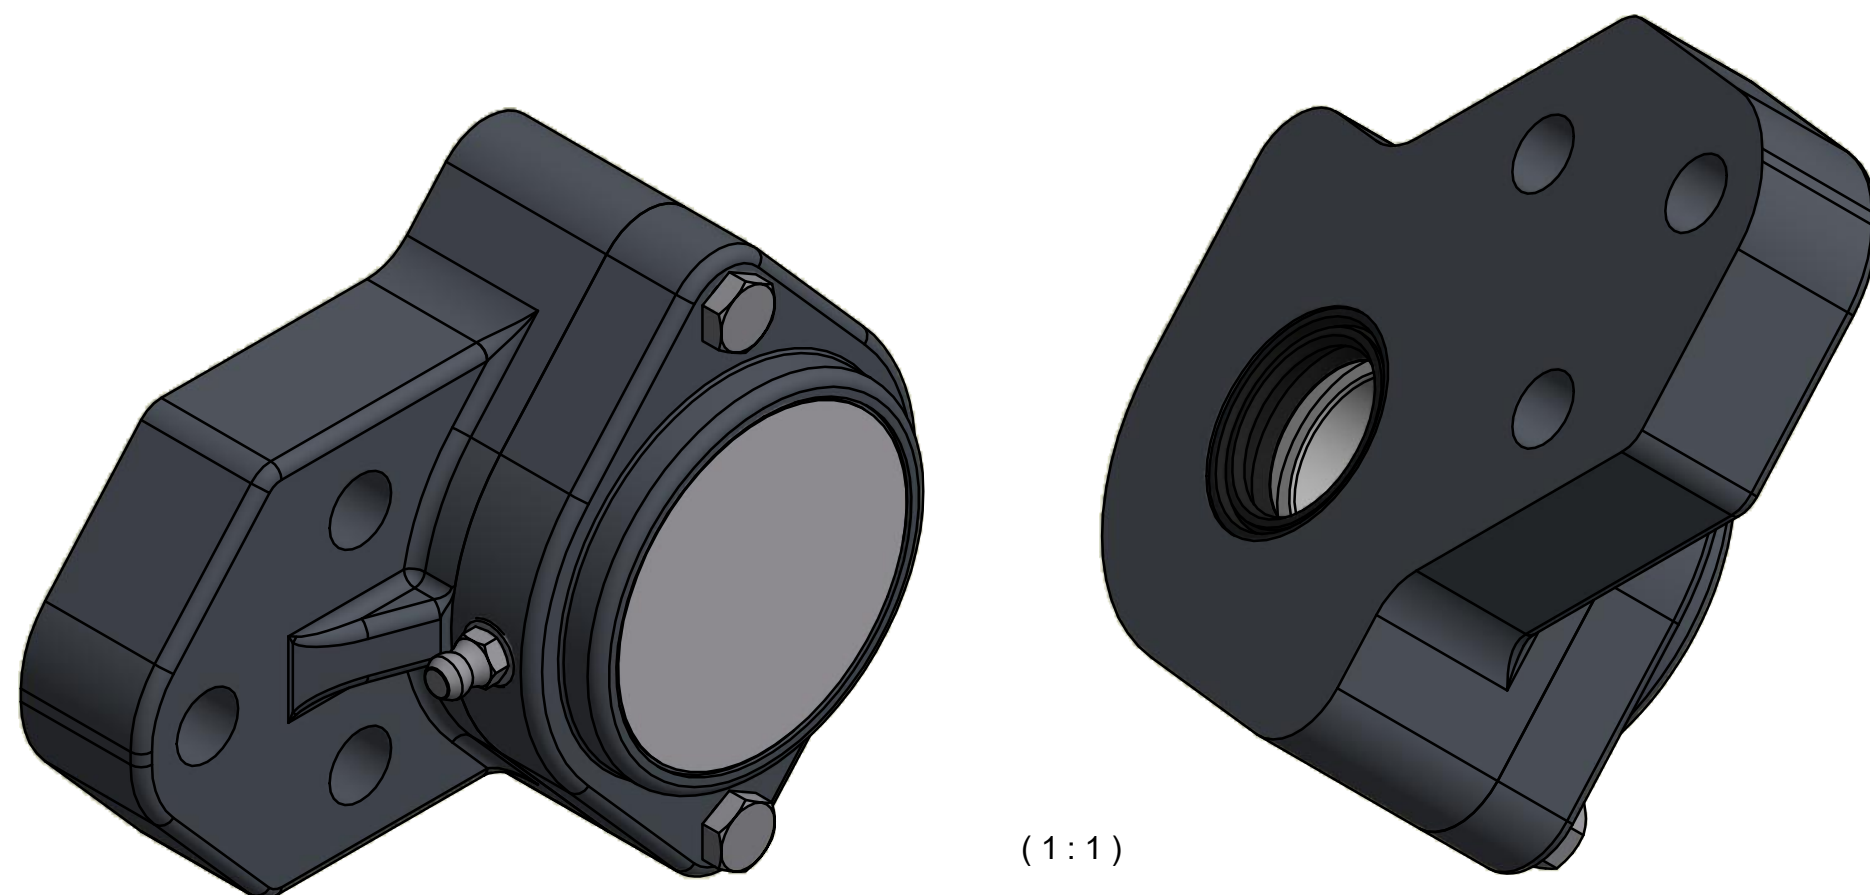
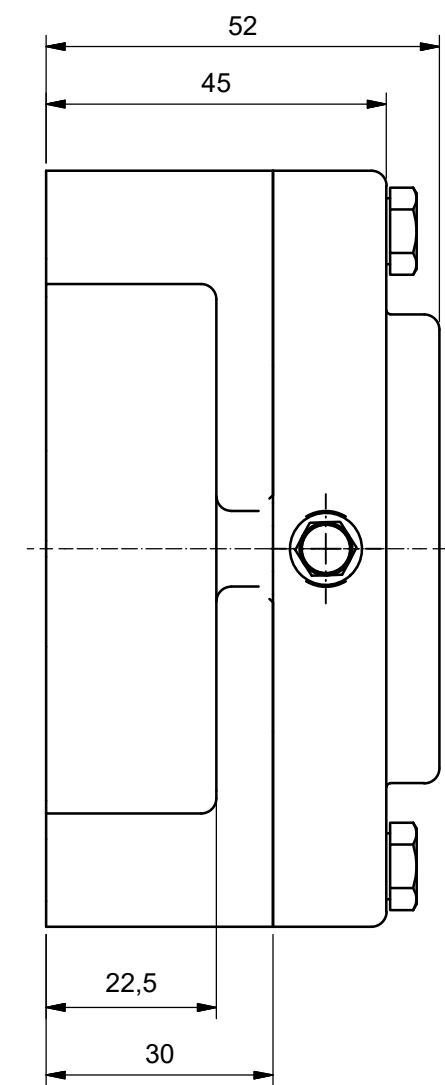
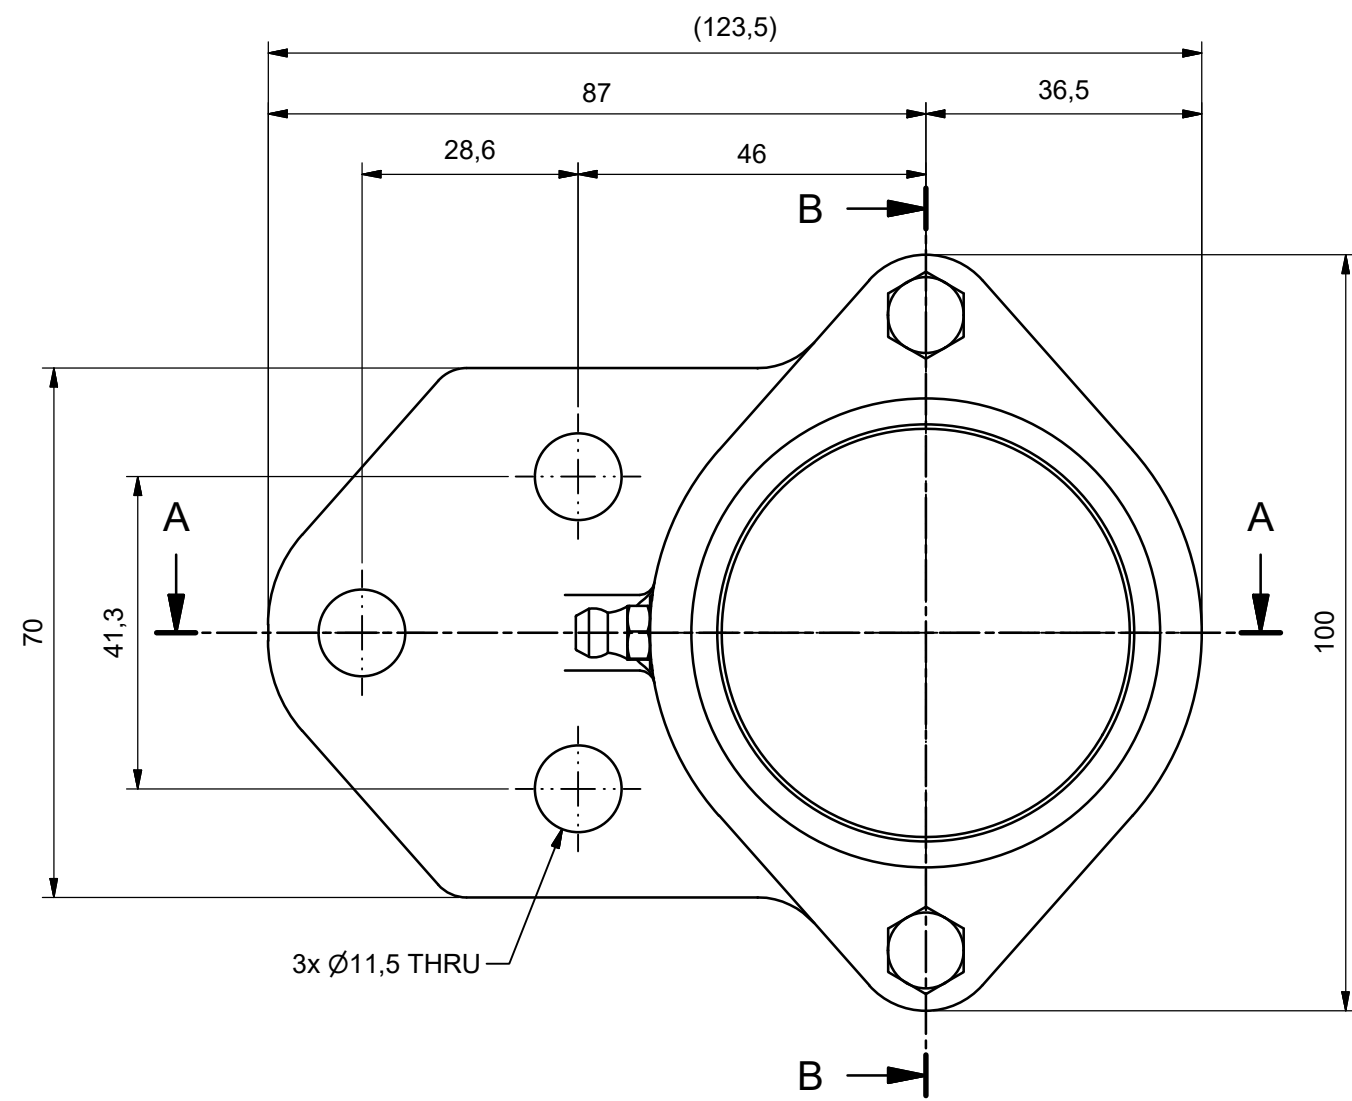


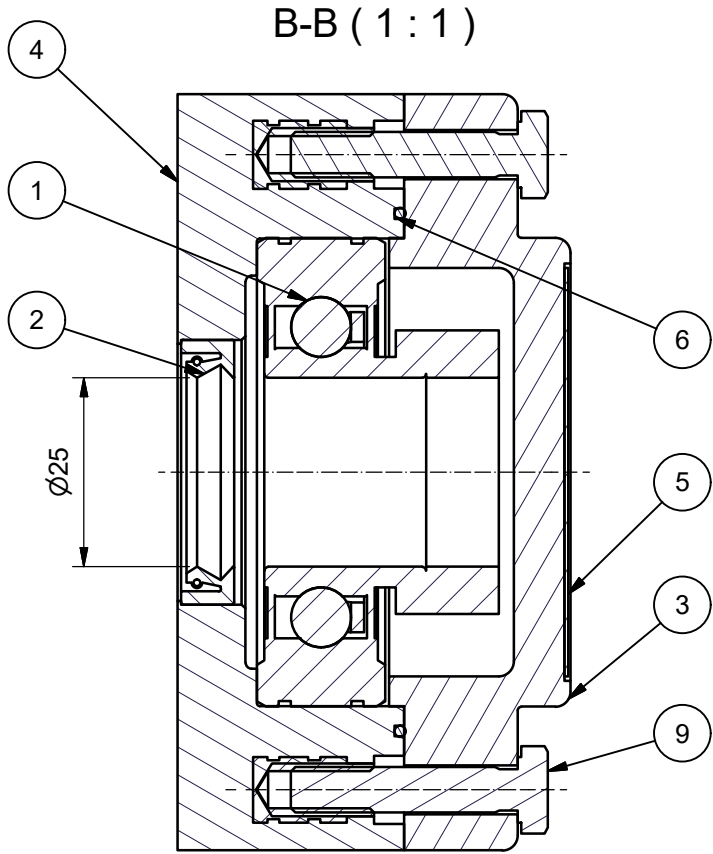

(1 : 1)

Materiale / Material:			
u =  Ra 6.3		Format: A3	
v =  Ra 3.2		Sign.: fje	
w =  Ra 1.6		Date / Date: 25-04-2019	
x =  Ra 1.6		Vægt / Weight: 0,316 kg	
y =  Ra 0.5		Målforhold / Scale: 1 : 1	
z =  Ra 0.3		Standard: NG25F30	
Ikke tolerancesatte mål iht. DS/ISO 2768-f. Skarpe kanter reffes. Non-toleranced measures acc. DS/ISO 2768-f. Deburr sharp edges.		Tegn. nr. / Drawing id.: NG25F30	
Ovenstående gælder kun produktionstegninger. The above stated only applies production drawings.		Side / Page: 1 / 2	

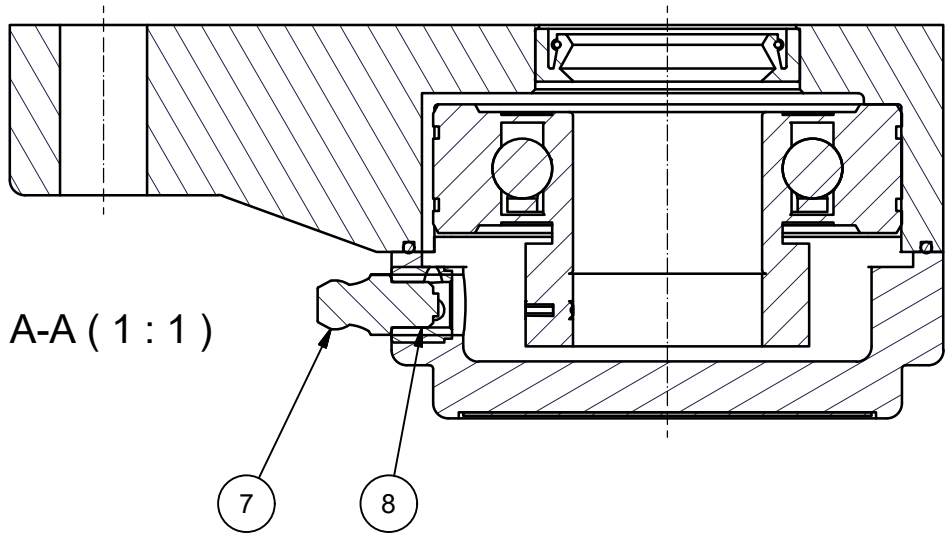

9	2	DIN 933-A2 M6X30 Rustfri sætskrue	KI820060
8	1	Forskruning M6/M10, L=8	KI820040
7	1	DIN 71412-A2 Smørenippel M6x1,0 SN	KI820010
6	1	NG O-ring snor i tromle, L=220	KI820005
5	1	NG Logo, DK 25 lukket	KI810012
4	1	NG 25-F3 Flangeleje	KI802920
3	1	NG 25-F3 Endedæksel lukket	KI802910
2	1	Olietætningsring Nitril; 253507CC	KI802570
1	1	NG PE leje ø25 incl. exentrick	KI802550
Pos.	Antal	Navn	Varenummer

Materiale / Material:				bj-gear	
		Format: A3		Tel.: +45 87 40 80 80 www.bj-gear.com	
$\frac{u}{} = \sqrt{}$		$\frac{x}{} = \sqrt{}$ Ra 1.6		NG 25-F30 C, FLANGELEJE LUKKET, KOMPLET	
		Indstikslibes			
$\frac{v}{} = \sqrt{}$ Ra 6.3		$\frac{y}{} = \sqrt{}$ U Ra 0.5 L Ra 0.3			
$\frac{w}{} = \sqrt{}$ Ra 3.2		$\frac{z}{} = \sqrt{}$ U Ra 18 L Ra 8			
		Sign.: fje		Beskrivelse / Description:	
		Date / Date: 25-04-2019			
		Vægt / Weight: 0,316 kg			
Ikke tolerancesatte mål iht. DS/ISO 2768-f. Skarpe kanter reffes. Non-toleranced measures acc. DS/ISO 2768-f. Deburr sharp edges.		Målføhold / Scale: 1 : 1		Tegn. nr. / Drawing id.:	
Ovenstående gælder kun produktionstegninger. The above stated only applies production drawings.		Standard:		NG25F30	
				Rev.: - Side / Page: 2 / 2	