



SAFETY COUPLINGS

TORQUE LIMITERS

KBK – The Company

KBK Antriebstechnik GmbH - successful since 2003

Our products are based on the experience of more than 30 years in developing and producing shaft-hub-connections and backlash-free couplings combined with professional advice, service and professional competence. Our sophisticated modular design forms the basis for top quality products at reasonable prices. It enables us to produce almost all elastomer-, metal bellows-, safety couplings and line shafts as well as locking devices from the standard range within two hours, provide them with customized bores and organize a direct delivery to you by courier. Our traffic-favourable position on the edge of the Rhine-Main area simplifies the delivery to our customers all over the world. Benefit from our strenghts and our strong motivation to satisfy all our business-partners and save time and money for your company.



Contents

Switching Modes

Page 5

Safety Couplings with ball bearings

Page 6

KBK/LP with keyway

Page 7

KBK/LLP with keyway

Page 8

KBK/LK with collet clamp

Page 9

KBK/LLK with collet clamp

Page 10

KBK/LI with inner cone

Page 11

KBK/LLI with inner cone

Page 12

KBK/LA with outer cone

Page 13

KBK/LLA with outer cone

Page 14

Safety Couplings with bush bearings

Page 15

KBK/CP with keyway

Page 16

KBK/CK with collet clamp

Page 17

KBK/CI with inner cone

Page 18

KBK/CA with outer cone

Page 19

Safety Couplings with metal bellows

Page 20/21

KBK/BKK with two collet clamps

Page 22

KBK/BKI with collet clamp and inner cone

Page 23

KBK/BKA with collet clamp and outer cone

Page 24

KBK/BHH with split hubs

Page 25

KBK/BKPK axial pluggable, with collet clamp (size 2 - 60)

Page 26

KBK/BKPK axial pluggable, with collet clamp (size 80 - 500)

Page 27

KBK/BKPI axial pluggable, with inner cone

Page 28

KBK/BKPA axial pluggable, with outer cone

Page 29

KBK/BIK with inner cone and collet clamp

Page 30

KBK/BII with two inner cones

Page 31

KBK/BIA with inner cone and outer cone

Page 32

KBK/BAK with outer cone and collet clamp

Page 33

KBK/BAI with outer cone and inner cone

Page 34

KBK/BAA with two outer cones

Page 35

Contents

Safety Couplings with elastomer inserts	Page 36/37
KBK/EPP with two keyways	Page 38
KBK/EPK with keyway and collet clamp	Page 39
KBK/EPI with keyway and inner cone	Page 40
KBK/EPA with keyway and outer cone	Page 41
KBK/EKP with collet clamp and keyway	Page 42
KBK/EKK with two collet clamps	Page 43
KBK/EKI with collet clamp and inner cone	Page 44
KBK/EKA with collet clamp and outer cone	Page 45
KBK/EHH with split hubs	Page 46
KBK/EAP with outer cone and keyway	Page 47
KBK/EAK with outer cone and collet clamp	Page 48
KBK/EAI with outer cone and inner cone	Page 49
KBK/EAA with two outer cones	Page 50
 Spider Elements for Couplings series KBK/E	 Page 51

Possible systems with safety couplings



Single Position

C

When exceeding the adjusted overload torque, the coupling will disengage. After eliminating the malfunction, the coupling will re-engage automatically. This can only happen at a certain position within 360° which can be noticed on the markings of the adjusting ring and the flange.

Note: Engagement is only possible at low speed.



Multi Position

D

When exceeding the adjusted overload torque, the coupling will disengage. After eliminating the malfunction, the coupling will re-engage automatically at the next successive ball points. Thus the safety coupling is immediately ready for use.

Note: Engagement is only possible at low speed.

Up to size 30 the angle of engagement is 45°.
From size 60 the angle of engagement is 60°.
Further angles of engagement upon request.



Full Disengagement

F

When exceeding the adjusted overload torque, the coupling will disengage. The driving and driven side are permanently torque-free separated from each other. After eliminating the malfunction, the coupling can be re-engaged by applying axial pressure on the pressure ring. It might be necessary to slightly rotate the driving and driven side towards each other.

Note: Engagement is only possible at standstill



Failsafe System

G

When the preset overload torque has been reached, the coupling will disengage and after a few angle degrees it will be mechanically locked. The response of the safety coupling is detected by using a limit switch and the torque flow will be stopped.

Safety Couplings with ball bearings

KBK|LP -10 ~ 1400

Safety Coupling
with keyway



P. 7

KBK|LLP -10 ~ 1400

Safety Coupling
with keyway and two bearings



P. 8

KBK|LK -2 ~ 500

Safety Coupling
with collet clamp



P. 9

KBK|LLK -2 ~ 500

Safety Coupling
with collet clamp and two bearings



P. 10

KBK|LI -10 ~ 1400

Safety Coupling
with inner cone



P. 11

KBK|LLI -10 ~ 1400

Safety Coupling
with inner cone and two bearings



P. 12

KBK|LA -10 ~ 1400

Safety Coupling
with outer cone



P. 13

KBK|LLA -10 ~ 1400

Safety Coupling
with outer cone and two bearings




P. 14

Safety Coupling

with keyway

optional
nickel-plated version
optional full stainless
steel version

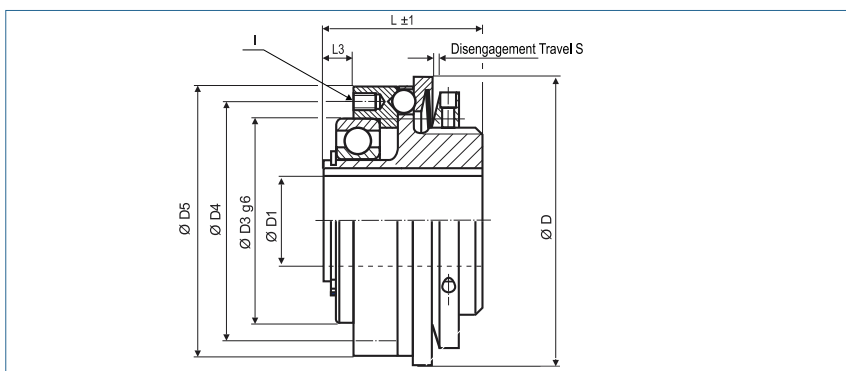

Order Code

KBK/L-P - 60 - N20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min-max				Length			6x	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-10	49	6-12	37	42	47	26	5	0.7	M3	3-7	5-10	12000	0.15	0.4
-30	64	10-16	47	53	60	33.5	6	1.2	M4	5-15	10-30	9400	0.45	1.9
-60	79	15-24	62	69	75	45	8	1.2	M5	13-35	20-65	7800	0.83	5.1
-80	94	19-29	68	80	90	46	10	2	M6	15-40	30-80	6400	1.4	12
-150	94	19-29	68	80	90	46	10	2	M6	50-130	65-150	6400	1.4	12
-200	109	20-38	80	90	105	52	10	2	M6	30-90	80-200	5500	1.64	19
-300	119	20-42	90	102	115	58	10	2	M8	60-200	100-300	5000	2.5	38
-500	129	20-50	100	112	125	57	10	2	M8	80-250	200-500	4500	3.8	68
-800	169	30-60	110	125	165	80	15	2	M12	260-600	500-900	3500	11	318
-1400	169	30-60	110	125	165	80	15	2	M12	450-900	800-1400	3500	11	318




Temperature Range -30 °C ~ 120 °C

Safety Coupling

with keyway and two bearings

optional
nickel-plated version
optional full stainless
steel version

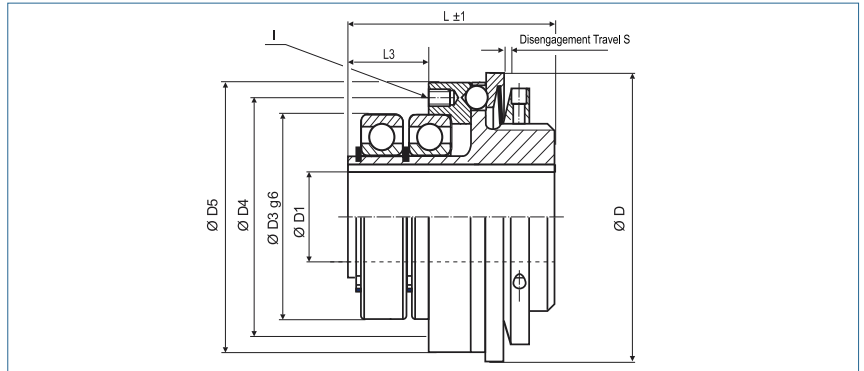

Order Code

KBK/LL-P - 60 - N20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min~max				Length			6x	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-10	49	6-12	37	42	47	36	15	0.7	M3	3-7	5-10	12000	0.18	0.4
-30	64	10-16	47	53	60	47	20	1.2	M4	5-15	10-30	9400	0.53	2.2
-60	79	15-24	62	69	75	62	26	1.2	M5	13-35	20-65	7800	0.98	6.0
-80	94	19-29	68	80	90	62	27	2	M6	15-40	30-80	6400	1.7	14
-150	94	19-29	68	80	90	62	27	2	M6	50-130	65-150	6400	1.7	14
-200	109	20-38	80	90	105	68	28	2	M6	30-90	80-200	5500	1.9	23
-300	119	20-42	90	102	115	78	31	2	M8	60-200	100-300	5000	3.0	44
-500	129	20-50	100	112	125	77	31	2	M8	80-250	200-500	4500	4.5	80
-800	169	30-60	110	125	165	103	38	2	M12	260-600	500-900	3500	13	376
-1400	169	30-60	110	125	165	103	38	2	M12	450-900	800-1400	3500	13	376




Temperature Range -30 °C ~ 120 °C

Safety Coupling

with collet clamp

optional
nickel-plated version
optional full stainless
steel version

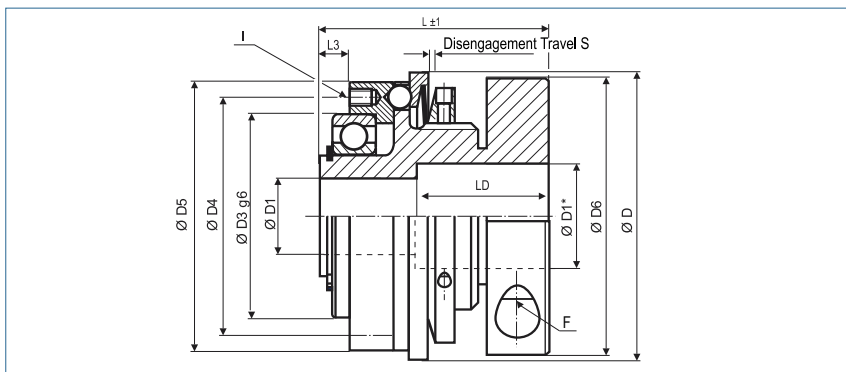

Order Code

KBK/L-K - 60

Size

20H7

ØD1
(H7)Disengagement
Torque

20Nm

C or

D

Torque
Range

2

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)											Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	Ø D6	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)
	Outer Ø	Bore Size (H7) min~max					Length			6x	Screw ISO4762 T _A (Nm)	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-2	29	3-8	19	21	25	25	28	3	0.7	M2	M3 2	0.2-1.5	0.5-2	13200	0.06	0.05
-4.5	36	6-13 9#	26	28	32	32.5	30	4	0.7	M2	M4 3.5	1-3	3-6	12300	0.11	0.20
-7	49	6-16 11#	37	42	47	40.5	36	5	0.7	M3	M4 4.5	1-4	3-7	12000	0.18	0.4
-10	49	6-16 11#	37	42	47	40.5	36	5	0.7	M3	M4 5.1	3-7	5-10	12000	0.18	0.4
-30	64	10-20 14#	47	53	60	56	52.5	6	1.2	M4	M6 15	5-15	10-30	9400	0.59	2.4
-60	79	12-28 21#	62	69	75	66	73	8	1.2	M5	M8 36	13-35	20-65	7800	1.05	6.4
-80	94	14-35 27#	68	80	90	82	67	10	2	M6	M10 84	15-40	30-80	6400	2.4	21
-150	94	14-35 27#	68	80	90	82	67	10	2	M6	M10 84	50-130	65-150	6400	2.4	21
-200	109	22-41 33#	80	90	105	90	79	10	2	M6	M12 125	30-90	80-200	5500	2.9	35
-300	119	30-50 42#	90	102	115	110	84	10	2	M8	M12 145	60-200	150-300	5000	4.4	66
-500	129	35-56 46#	100	112	125	122	95	10	2	M8	M12 145	80-250	200-500	4500	6.4	113



Bore > Ø D1 and ≤ D1* only over LD

Keyway optional acc. DIN 6885
biggest bore marked with a #


Temperature Range -30 °C ~ 120 °C

Size	2	4.5	7	10	30	60	80	150	200	300	500
D1*	11	X	20	20	26	31	38	38	X	57	62
LD	15	X	20	20	28	38	34	34	X	42	56

Safety Coupling

with collet clamp and two bearings

optional
nickel-plated version
optional full stainless
steel version

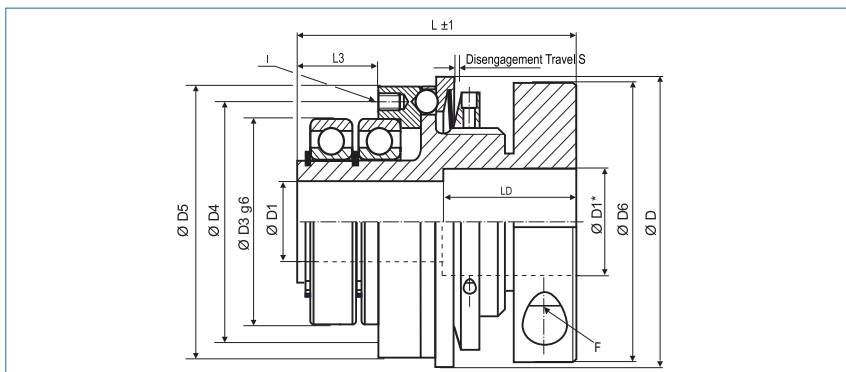

Order Code

KBK/LL-K - 60 - 20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)											Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	Ø D6	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)
	Outer Ø	Bore Size (H7) min-max					Length			6x	Screw ISO4762 T _A (Nm)	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-2	29	3-8	19	21	25	25	34	7	0.7	M2	M3 2	0.2-1.5	0.5-2	13200	0.07	0.06
-4.5	36	6-13 9#	26	28	32	32.5	37	9	0.7	M2	M4 3.5	1-3	3-6	12300	0.13	0.22
-7	49	6-16 11#	37	42	47	40.5	46	15	0.7	M3	M4 4.5	1-4	3-7	12000	0.21	0.5
-10	49	6-16 11#	37	42	47	40.5	46	15	0.7	M3	M4 5.1	3-7	5-10	12000	0.21	0.5
-30	64	10-20 14#	47	53	60	56	66	20	1.2	M4	M6 15	5-15	10-30	9400	0.67	2.8
-60	79	12-28 21#	62	69	75	66	90	26	1.2	M5	M8 36	13-35	20-65	7800	1.2	7.3
-80	94	14-35 27#	68	80	90	82	83	27	2	M6	M10 84	15-40	30-80	6400	2.7	23
-150	94	14-35 27#	68	80	90	82	83	27	2	M6	M10 84	50-130	65-150	6400	2.7	23
-200	109	22-41 33#	80	90	105	90	96	28	2	M6	M12 125	30-90	80-200	5500	3.3	39
-300	119	30-50 42#	90	102	115	110	104	31	2	M8	M12 145	60-200	150-300	5000	4.9	73
-500	129	35-56 46#	100	112	125	122	113	31	2	M8	M12 145	80-250	200-500	4500	7.0	125




Bore	> Ø D1 and ≤ D1* only over LD
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C

Size	2	4.5	7	10	30	60	80	150	200	300	500
D1*	11	X	20	20	26	31	38	38	X	57	62
LD	15	X	20	20	28	38	34	34	X	42	56

Safety Coupling

with inner cone

optional
nickel-plated version
optional full stainless
steel version

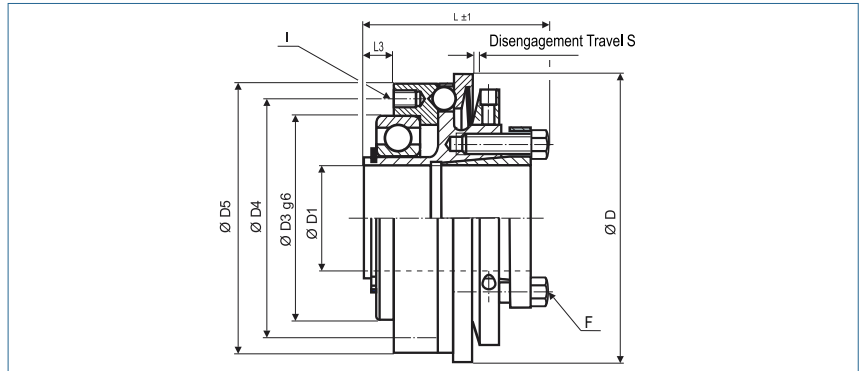

Order Code

KBK/L-I - 60 - 20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H/)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min~max				Length			6x	Screw ISO4017 T _A (Nm)	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-10	49	6-14 10#	37	42	47	36	5	0.7	M3	M3 2.1	3-7	5-10	12000	0.18	0.4
-30	64	12-20 14#	47	53	60	45	6	1.2	M4	M5 6	5-15	10-30	9400	0.54	2.2
-60	79	15-25 18#	62	69	75	58	8	1.2	M5	M6 8.5	13-35	20-65	7800	1.01	6.2
-80	94	20-35 27#	68	80	90	60	10	2	M6	M6 14	15-40	30-80	6400	1.72	15
-150	94	20-35 27#	68	80	90	60	10	2	M6	M6 14	50-130	65-150	6400	1.72	15
-200	109	20-40 32#	80	90	105	66	10	2	M6	M6 14	30-90	80-200	5500	2	24
-300	119	25-45 37#	90	102	115	75	10	2	M8	M8 20	60-200	150-300	5000	3.3	49
-500	129	35-55 45#	100	112	125	75	10	2	M8	M8 26	80-250	200-500	4500	4.7	83
-800	169	50-70 58#	110	125	165	110	15	2	M12	M16 45	260-600	500-900	3500	13.1	380
-1400	169	50-70 58#	110	125	165	110	15	2	M12	M16 80	450-900	800-1400	3500	13.2	385



Keyway

optional acc. DIN 6885


biggest bore marked with a #

Temperature Range

-30 °C ~ 120 °C

Safety Coupling

with inner cone and two bearings

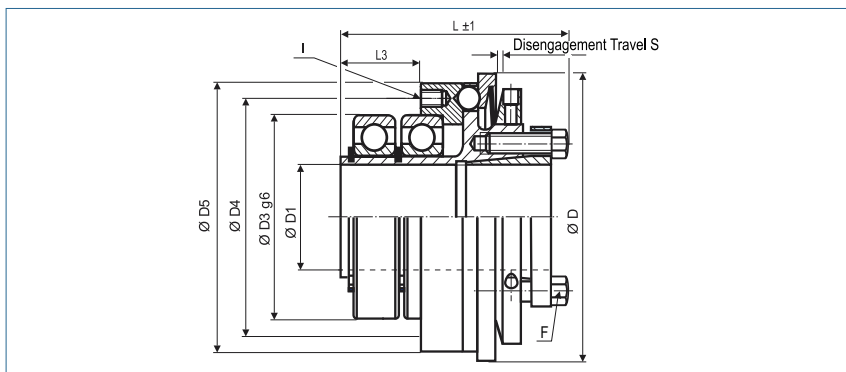 optional
nickel-plated version
optional full stainless
steel version

Order Code
KBK/LL-I - 60 - 20H7 - 20Nm - C or D - 2

Type . Size

 ØD1
(H7)

 Disengagement
Torque

 Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min-max				Length			6x	Screw (ISO4017) T _A (Nm)	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-10	49	6-14 10#	37	42	47	46	15	0.7	M3	M3 2.1	3-7	5-10	12000	0.21	0.5
-30	64	12-20 14#	47	53	60	58	20	1.2	M4	M5 6	5-15	10-30	9400	0.62	2.6
-60	79	15-25 18#	62	69	75	75	26	1.2	M5	M6 8.5	13-35	20-65	7800	1.16	7.1
-80	94	20-35 27#	68	80	90	76	27	2	M6	M6 14	15-40	30-80	6400	1.97	17
-150	94	20-35 27#	68	80	90	76	27	2	M6	M6 14	50-130	65-150	6400	1.97	17
-200	109	20-40 32#	80	90	105	85	28	2	M6	M6 14	30-90	80-200	5500	2.30	27
-300	119	25-45 37#	90	102	115	95	31	2	M8	M8 20	60-200	150-300	5000	3.7	56
-500	129	35-55 45	100	112	125	95	31	2	M8	M8 26	80-250	200-500	4500	5.3	95
-800	169	50-70 58#	110	125	165	133	38	2	M12	M16 45	260-600	500-900	3500	15	438
-1400	169	50-70 58#	110	125	165	133	38	2	M12	M16 80	450-900	800-1400	3500	15	438


Keyway

optional acc. DIN 6885

biggest bore marked with a #


Temperature Range

-30 °C ~ 120 °C

Safety Coupling

with outer cone

optional
nickel-plated version
optional full stainless
steel version

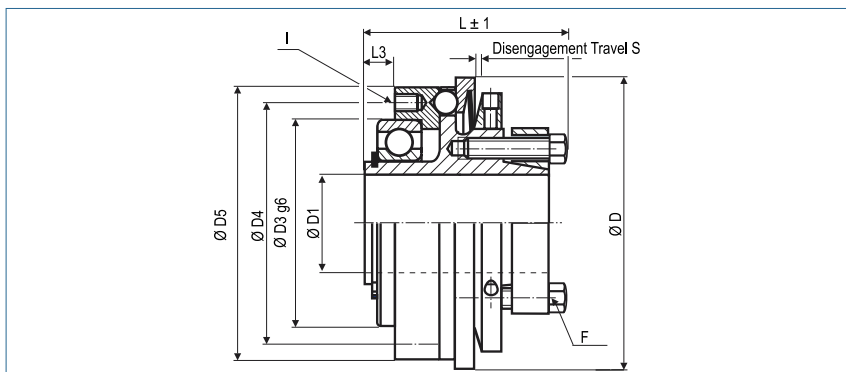

Order Code

KBK/L-A - 60 - 20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)
	Outer Ø	Bore Size (H7) min-max				Length			6x	Screw ISO4017 T _A (Nm)	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-10	49	5-12 10#	37	42	47	37.5	5	0.7	M3	M3 2.1	3-7	5-10	12000	0.18	0.4
-30	64	12-20 14#	47	53	60	48	6	1.2	M4	M5 5.9	5-15	10-30	9400	0.54	2.2
-60	79	15-25 18#	62	69	75	66	8	1.2	M5	M5 8.7	13-35	20-65	7800	1.01	6.2
-80	94	20-35 27#	68	80	90	68.5	10	2	M6	M6 15	15-40	30-80	6400	1.72	15
-150	94	20-35 27#	68	80	90	68.5	10	2	M6	M6 15	50-130	65-150	6400	1.72	15
-200	109	20-42 34#	80	90	105	74.5	10	2	M6	M6 15	30-90	80-200	5500	2	24
-300	119	25-50 42#	90	102	115	83.5	10	2	M8	M8 25	60-200	150-300	5000	3.3	49
-500	129	35-55 45#	100	112	125	89	10	2	M8	M8 36	80-250	200-500	4500	4.7	83
-800	169	50-70 58#	110	125	165	118	15	2	M12	M12 85	260-600	500-900	3500	13.1	380
-1400	169	50-70 58#	110	125	165	118	15	2	M12	M12 115	450-900	800-1400	3500	13.2	385



Keyway

optional acc. DIN 6885

biggest bore marked with a #


Temperature Range

-30 °C ~ 120 °C

Safety Coupling

with outer cone and two bearings

optional
nickel-plated version
optional full stainless
steel version

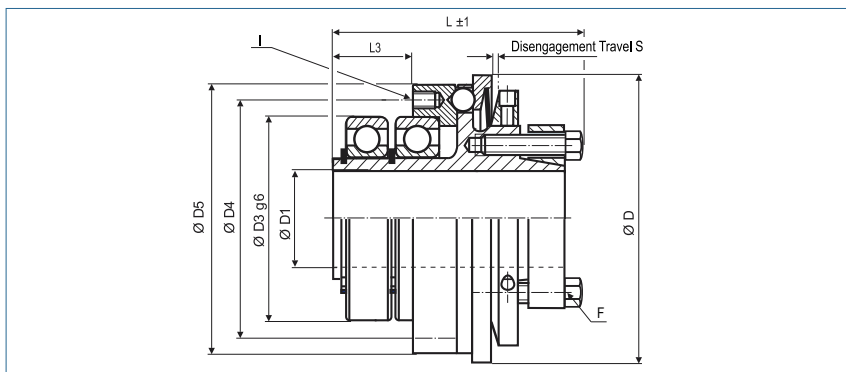

Order Code

KBK/LL-A - 60 - 20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min-max				Length			6x	Screw ISO4017 T _A (Nm)	1 T _{KN} (Nm)	2 T _{KN} (Nm)			
-10	49	5-12 10#	37	42	47	47.5	15	0.7	M3	M3 2.1	3-7	5-10	12000	0.21	0.5
-30	64	12-20 14#	47	53	60	61.5	20	1.2	M4	M5 5.9	5-15	10-30	9400	0.62	2.6
-60	79	15-25 18#	62	69	75	83	26	1.2	M5	M5 8.7	13-35	20-65	7800	1.16	7.1
-80	94	20-35 27#	68	80	90	84.5	27	2	M6	M6 15	15-40	30-80	6400	1.97	17
-150	94	20-35 27#	68	80	90	84.5	27	2	M6	M6 15	50-130	65-150	6400	1.97	17
-200	109	20-42 34#	80	90	105	93.5	28	2	M6	M6 15	30-90	80-200	5500	2.30	27
-300	119	25-50 42#	90	102	115	103.5	31	2	M8	M8 25	60-200	150-300	5000	3.7	56
-500	129	35-55 45#	100	112	125	109	31	2	M8	M8 36	80-250	200-500	4500	5.3	95
-800	169	50-70 58#	110	125	165	141	38	2	M12	M12 85	260-600	500-900	3500	15	438
-1400	169	50-70 58#	110	125	165	141	38	2	M12	M12 115	450-900	800-1400	3500	15	438



Keyway

optional acc. DIN 6885

biggest bore marked with a #

Temperature Range

-30 °C ~ 120 °C

Safety Couplings with bush bearings

KBK|CP -10 ~ 500

Safety Coupling
with keyway



P. 16

KBK|CK -2 ~ 500

Safety Coupling
with collet clamp



P. 17

KBK|CI -10 ~ 500

Safety Coupling
with inner cone



P. 18

KBK|CA -10 ~ 500

Safety Coupling
with outer cone




P. 19

Safety Coupling

with keyway

optional
nickel-plated version
optional full stainless
steel version

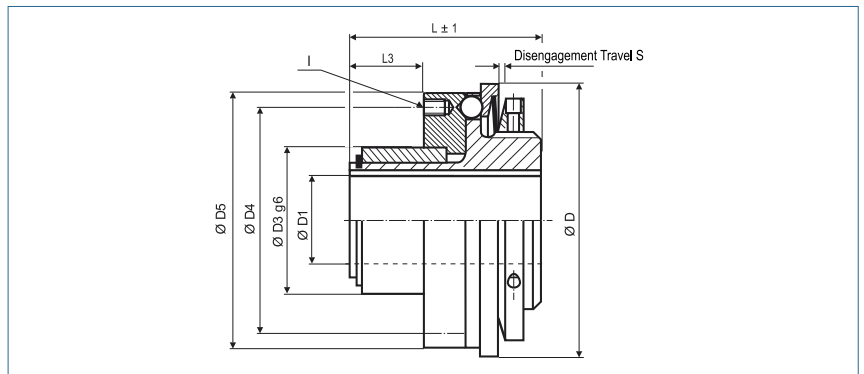

Order Code

KBK/CP - 60 - N20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min~max				Length			6x	1 TKN (Nm)	2 TKN (Nm)			
-10	49	6-10	24	30	47	34	8	0.7	M3	3-7	5-10	12000	0.15	0.35
-30	64	10-14	30	46	60	40	9	1.2	M4	5-15	10-30	9400	0.45	1.9
-60	79	15-19	36	50	75	48	16	1.2	M5	13-35	20-65	7800	0.83	5.1
-80	94	19-30	48	65	90	58	22	2	M6	15-40	30-80	6400	1.4	12
-150	94	19-30	48	65	90	58	22	2	M6	50-130	65-150	6400	1.4	12
-200	109	20-33	52	70	105	63	25	2	M6	30-90	80-200	5500	1.64	19
-300	119	20-38	58	76	115	75	31	2	M8	60-200	150-300	5000	2.5	38
-500	129	20-42	66	110	125	94	33	2	M8	80-250	200-500	4500	3.8	68




Temperature Range -30 °C ~ 120 °C

Safety Coupling

with collet clamp

optional
nickel-plated version
optional full stainless
steel version

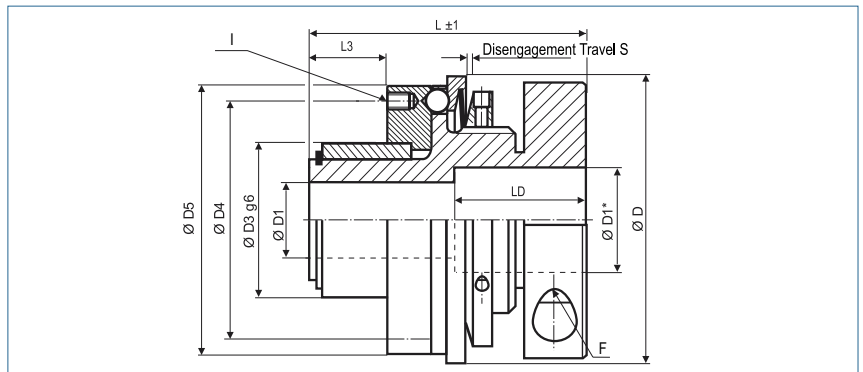

Order Code

KBK/CK - 60 - 20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min~max				Length			6x	Screw ISO4762 TA (Nm)	1 TKN (Nm)	2 TKN (Nm)			
-2	29	3-6	14	19	25	35	6	0.7	M2	M3 2	0.2-1.5	0.5-2	13200	0.06	0.05
-4.5	36	6-12 8#	20	26	32	36	7	0.7	M2	M4 3.5	1-3	3-6	12300	0.12	0.20
-7	49	6-16 11#	24	30	47	44	8	0.7	M3	M4 5.1	1-4	3-7	12000	0.18	0.4
-10	49	6-16 11#	24	30	47	44	8	0.7	M3	M4 5.1	3-7	5-10	12000	0.18	0.4
-30	64	10-20 14#	30	46	60	59	9	1.2	M4	M6 15	5-15	10-30	9400	0.59	2.4
-60	79	12-25 18#	36	50	75	76	16	1.2	M5	M8 36	13-35	20-65	7800	1.05	6.4
-80	94	14-35 27#	48	65	90	79	22	2	M6	M10 84	15-40	30-80	6400	2.4	21
-150	94	14-35 27#	48	65	90	79	22	2	M6	M10 84	50-130	65-150	6400	2.4	21
-200	109	22-40 32#	52	70	105	91	25	2	M6	M12 125	30-90	80-200	5500	3.0	35
-300	119	30-46 38#	58	76	115	101	31	2	M8	M12 145	60-200	150-300	5000	4.4	66
-500	129	35-50 41#	66	110	125	134	33	2	M8	M12 145	80-250	200-500	4500	6.4	113



Bore > Ø D1 and ≤ D1* only over LD

Keyway optional acc. DIN 6885
biggest bore marked with a #


Temperature Range -30 °C ~ 120 °C

Size	2	45	7	10	30	60	80	150	200	300	500
D1*	11	X	20	20	26	31	38	38	X	57	62
LD	15	X	20	20	28	38	34	34	X	42	56

Safety Coupling

with inner cone

optional
nickel-plated version
optional full stainless
steel version

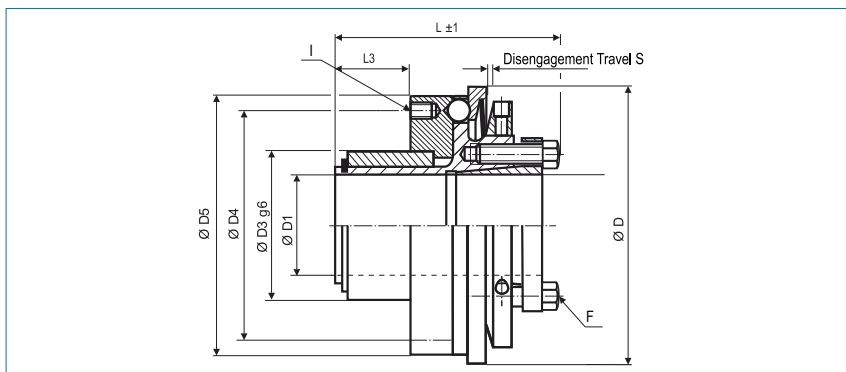

Order Code

KBK/CI - 60 - 20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min~max				Length			6x	Screw ISO4017 TA (Nm)	1 TKN (Nm)	2 TKN (Nm)			
-10	49	6-14 10#	24	30	47	44	8	0.7	M3	M3 2.1	3-7	5-10	12000	0.18	0.4
-30	64	12-20 14#	30	46	60	51	9	1.2	M4	M5 6	5-15	10-30	9400	0.54	2.2
-60	79	15-25 18#	36	50	75	61	16	1.2	M5	M6 8.5	13-35	20-65	7800	1	6.2
-80	94	20-35 27#	48	65	90	72	22	2	M6	M6 14	15-40	30-80	6400	1.7	15
-150	94	20-35 27#	48	65	90	72	22	2	M6	M6 14	50-130	65-150	6400	1.7	15
-200	109	20-40 32#	52	70	105	77	25	2	M6	M6 14	30-90	80-200	5500	2	24
-300	119	25-46 38#	58	76	115	93	31	2	M8	M8 20	60-200	150-300	5000	3.3	49
-500	129	35-50 41#	66	110	125	112	33	2	M8	M8 26	80-250	200-500	4500	4.7	83



Keyway

optional acc. DIN 6885

biggest bore marked with a #


Temperature Range

-30 °C ~ 120 °C

Safety Coupling

with outer cone

optional
nickel-plated version
optional full stainless
steel version

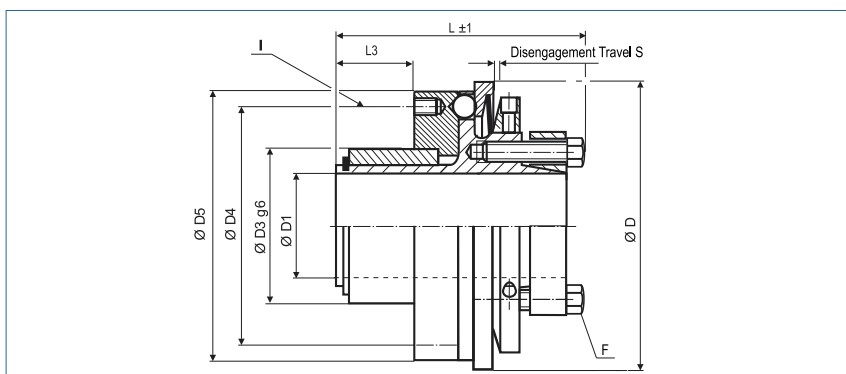

Order Code

KBK/CA - 60 - 20H7 - 20Nm - C or D - 2

Type

Size

ØD1
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data				
	ØD	Ø D1	Ø D3	Ø D4	Ø D5	L	L3	S	I	F	Torque Range		max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)
	Outer Ø	Bore Size (H7) min~max				Length			6x	Screw ISO4017 TA (Nm)	1 TKN (Nm)	2 TKN (Nm)			
-10	49	5-14	24	30	47	46	8	0.7	M3	M3	3-7	5-10	12000	0.18	0.4
		8#								2.1					
-30	64	12-20	30	46	60	54	9	1.2	M4	M5	5-15	10-30	9400	0.53	2.2
		14#								5.9					
-60	79	15-25	36	50	75	69	16	1.2	M5	M5	13-35	20-65	7800	1	6.1
		18#								8.7					
-80	94	20-35	48	65	90	80	22	2	M6	M6	15-40	30-80	6400	1.8	16
		27#								15					
-150	94	20-35	48	65	90	80	22	2	M6	M6	50-130	65-150	6400	1.8	16
		27#								15					
-200	109	20-40	52	70	105	85	25	2	M6	M6	30-90	80-200	5500	2	24
		32#								15					
-300	119	25-46	58	76	115	101	31	2	M8	M8	60-200	150-300	5000	3.2	47
		38#								25					
-500	129	35-50	66	110	125	126	33	2	M8	M8	80-250	200-500	4500	4.7	84
		41#								36					



Keyway

optional acc. DIN 6885

biggest bore marked with a #

Temperature Range

-30 °C ~ 120 °C

Safety Couplings with metal bellows

KBK|BKK -2 ~ 500

Safety Coupling
with collet clamp



P. 22

KBK|BKI -10 ~ 500

Safety Coupling
with collet clamp and inner cone



P. 23

KBK|BKA -10 ~ 500

Safety Coupling
with collet clamp and outer cone



P. 24

KBK|BHH -10 ~ 500

Safety Coupling
with split hubs



P. 25

KBK|BKPK -2 ~ 60

Safety Coupling
axial pluggable, with collet clamp



P. 26

KBK|BKPK -80 ~ 500

Safety Coupling
axial pluggable, with collet clamp



P. 27

KBK|BKPI -10 ~ 500

Safety Coupling
axial pluggable, with inner cone



P. 28

KBK|BKPA -10 ~ 500

Safety Coupling
axial pluggable, with outer cone



P. 29

KBK|BIK -10 ~ 500

Safety Coupling
with inner cone and collet clamp



P. 30

KBK|BII -10 ~ 1400

Safety Coupling
with two inner cones



P. 31

KBK|BIA -10 ~ 1400

Safety Coupling
with inner cone and outer cone



P. 32

KBK|BAK -10 ~ 500

Safety Coupling
with outer cone and collet clamp



P. 33

Safety Couplings with metal bellows

KBK|BAI -10 ~ 1400

Safety Coupling
with outer cone and inner cone



P. 34

KBK|BAA -10 ~ 1400


Safety Coupling
with two outer cones



P. 35

Safety Coupling

with collet clamp

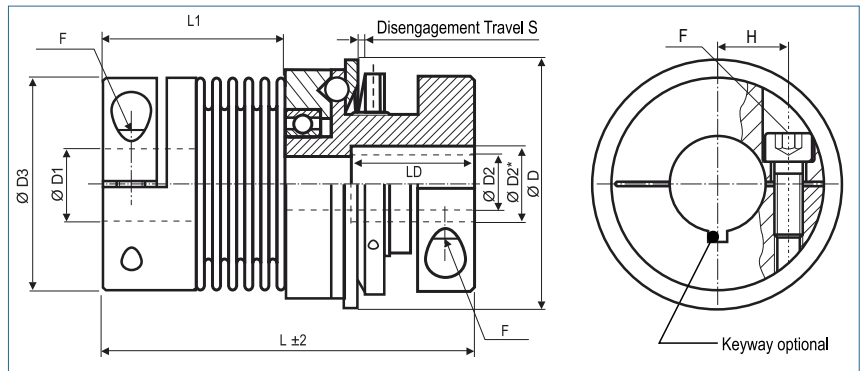optional
nickel-plated version
optional full stainless
steel versionoptional
laserwelded

Order Code

KBK/BKK - 60 - 105 - 16H7 - 14H7 - 20Nm - C or D - 1

Type

Size

Length

ØD1 (H7)

ØD2 (H7)

Disengagement
TorqueTorque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data										
	ØD	L	Ø D1	Ø D2	Ø D3	H	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max	Hub Ø		Screw ISO4762 TA (Nm)		1 TKN (Nm)				2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)	
-2	29	46	3-14	3-8	25	9	M3	21	0.7	13200	0.08	0.06	0.2 - 1.5	0.5 - 2	1.5	67	12	0.15	0.3	1.5
		52						27							1.3	21	11	0.20	0.4	1.5
		56						2							31	1.0	11	9	0.25	0.5
-4.5	36	57	6-16	6-13	32.5	12	M4	27	0.7	12300	0.16	0.26	1 - 3	3 - 6	6.5	168	32	0.1	0.3	1.5
		65		9#			3.5	36							4.2	41	20	0.2	0.5	2
-7	49	65	6-25	6-16	40	15.5	M4	34	0.7	11690	0.25	0.58	1 - 4	3 - 7	8.1	120	27	0.15	0.4	1.5
		75		11#			5.1	43							6.8	29	17	0.3	0.6	2
-10	49	65	6-25	6-16	40	15.5	M4	34	0.7	11690	0.25	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		75		11#			5.1	43							6.8	29	17	0.3	0.6	2
-30	64	85	10-32	10-20	56	20	M6	40.5	1.2	9540	0.77	3.2	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		94	30#	14#			15	48.5							28	225	28	0.25	1	2
-60	79	105	12-32	12-28	66	23	M8	50	1.2	8180	1.34	8.2	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		115		21#			36	60							50	340	50	0.25	1	2
-80	94	113	14-42	14-35	82	28	M10	57.5	2	6220	3.52	31	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		125		27#			72	68.5							75	400	50	0.25	0.8	2
-150	94	113	19-42	14-35	82	28	M10	57.5	2	6220	3.52	31	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		125		27#			72	68.5							105	595	85	0.25	0.8	2
-200	109	125	22-45	22-41	90	31	M12	63	2	5720	4.45	53	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		138		33#			125	75							116	460	82	0.25	0.8	2
-300	119	140	30-60	30-50	110	39	M12	67	2	5200	6.47	97	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		150		41#			125	78							285	1400	145	0.25	0.8	2
-500	129	158	35-70	35-56	122	42	M12	70	2	4470	9.22	164	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		170		46#			125	81							320	970	85	0.25	1	2



Bore	> Ø D2 and ≤ D2* only over LD
Material	bellows – stainless steel collet clamp (size 2 to size 60): aluminium collet clamp (size 80 to size 500): steel
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C


Size	2	45	7	10	30	60	80	150	200	300	500
D2*	11	X	20	20	26	31	38	38	X	57	62
LD	15	X	20	20	28	38	34	34	X	42	56

Safety Coupling

with collet clamp and inner cone

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

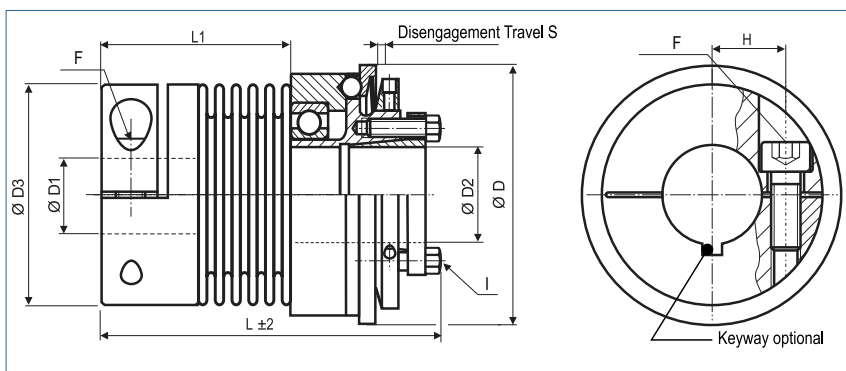

Order Code

KBK/BKI - 60 - 100 - 16H7 - 14H7 - 20Nm - C or D - 1

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data										
	ØD	L	Ø D1	Ø D2	Ø D3	H	F	L1	I	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max	Hub Ø		Screw ISO4762 TA (Nm)		Screw ISO4017 TA (Nm)					1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	65	6-25	6-14	40	15.5	M4	34	M3	0.7	11690	0.24	0.6	3-7	5-10	8.1	120	27	0.15	0.4	1.5
		75		10#			5.1	43	2.1							6.8	29	17	0.3	0.6	2
-30	64	77.5	10-32	12-20	56	20	M6	40.5	M5	1.2	9540	0.72	3.0	5-15	10-30	38	720	50	0.15	0.6	1.5
		86.5	30#	14#			15	48.5	6							28	225	28	0.25	1	2
-60	79	90	12-32	15-25	66	23	M8	50	M6	1.2	8180	1.3	7.9	12-35	20-60	75	1150	90	0.15	0.6	1.5
		100		18#			36	60	8.5							50	340	50	0.25	1	2
-80	94	106	14-42	20-35	82	28	M10	57.5	M6	2	6220	2.84	25	15-40	30-80	128	1200	80	0.2	0.5	1.5
		118		27#			72	68.5	14							75	400	50	0.25	0.8	2
-150	94	106	19-42	20-35	82	28	M10	57.5	M6	2	6220	2.84	25	50-130	65-150	155	2020	145	0.2	0.5	1.5
		118		27#			72	68.5	14							105	595	85	0.25	0.8	2
-200	109	113	22-45	20-40	90	31	M12	63	M6	2	5720	3.48	41	30-90	80-200	175	2500	147	0.2	0.5	1.5
		126		32#			125	75	14							116	460	82	0.25	0.8	2
-300	119	131	30-60	25-45	110	39	M12	67	M8	2	5200	5.35	80	60-200	150-300	502	6300	280	0.2	0.5	1.5
		141		37#			125	78	18							285	1400	145	0.25	0.8	2
-500	129	140	35-70	35-55	122	42	M12	70	M8	2	4470	7.54	134	80-250	200-500	690	7790	100	0.2	0.5	1.5
		151		45#			125	81	26							320	970	85	0.25	1	2



Material

bellows – stainless steel
collet clamp (size 2 to size 60): aluminium
collet clamp (size 80 to size 500): steel
inner cone: steel

Keyway

optional acc. DIN 6885
biggest bore marked with a #


Temperature Range

-30 °C ~ 120 °C

Safety Coupling

with collet clamp and outer cone

 optional
nickel-plated version
optional full stainless
steel version

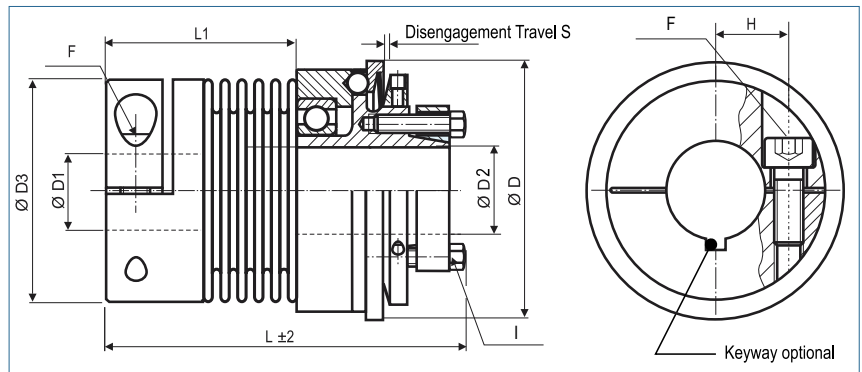 optional
laserwelded

Order Code
KBK/BA - 60 - 108 - 16H7 - 14H7 - 20Nm - C or D - 1

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range
 C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data										
	ØD	L	Ø D1	Ø D2	Ø D3	H	F	L1	I	S	max. speed (1/min)	Mass (kg)	Moment of Inertia (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max	Hub Ø		Screw ISO4762 TA (Nm)		Screw ISO4017 TA (Nm)					1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	67	6-25	5-14	40	15.5	M4	34	M3	0.7	11690	0.24	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		77		10#			5.1	43	2.1							6.8	29	17	0.3	0.6	2
-30	64	81	10-32	12-20	56	20	M6	40.5	M5	1.2	9540	0.71	2.9	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		90		30#			15	48.5	5.9							28	225	28	0.25	1	2
-60	79	98	12-32	15-25	66	23	M8	50	M5	1.2	8180	1.29	7.9	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		108		18#			36	60	8.7							50	340	50	0.25	1	2
-80	94	115	14-42	20-35	82	28	M10	57.5	M6	2	6220	2.89	25	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		127		27#			72	68.5	15							75	400	50	0.25	0.8	2
-150	94	115	19-42	20-35	82	28	M10	57.5	M6	2	6220	2.89	25	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		126		27#			72	68.5	15							105	595	85	0.25	0.8	2
-200	109	122	22-45	20-42	90	31	M12	63	M6	2	5720	3.5	42	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		135		34#			125	75	15							116	460	82	0.25	0.8	2
-300	119	140	30-60	25-50	110	39	M12	67	M8	2	5200	5.23	79	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		150		41#			125	78	25							285	1400	145	0.25	0.8	2
-500	129	154	34-70	35-55	122	42	M12	70	M8	2	4470	7.5	135	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		165		45#			125	81	36							320	970	85	0.25	1	2


Material

 outer cone – steel
 bellows - stainless steel
 collet clamp - aluminium;
 from Size 80 - steel

Keyway

 optional acc. DIN 6885
 biggest bore marked with a #

Temperature Range


-30 °C ~ 120 °C

Safety Coupling

with split hubs

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

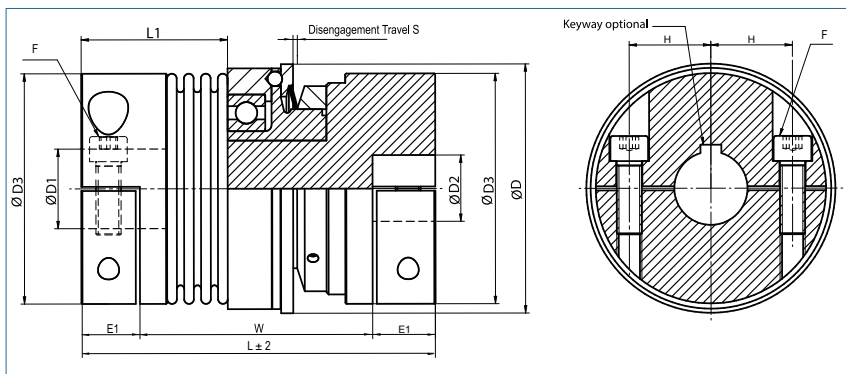

Order Code

KBK/BHH - 60 - 114 - 16H7 - 14H7 - 20Nm - C or D - 1

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range
C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)											Technical Data										
	ØD	L	Ø D1	Ø D2	Ø D3	E1	H	F	L1	W	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max	Hub Ø			Screw ISO4762 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	72 81	6-25	6-25	40	9	15.5	M4	34	54	0.7	11690	0,429	1,198	3 7	5 10	8.1 6.8	120 29	27 17	0.15 0.3	0.4 0.6	1.5 2
-30	64	99 107	10-32 30#	10-20	56	17	20	M6	42	65	1.2	9540	0,891	3,957	5 15	10 30	38 28	720 225	50 28	0.15 0.25	0.6 1	1.5 2
-60	79	116 127	12-32	12-28	66	22	23	M8	50	72	1.2	8180	1,523	9,705	12 35	20 60	75 50	1150 340	90 50	0.15 0.25	0.6 1	1.5 2
-80	94	136 148	14-42	14-35	82	24	28	M10	60	86	2	6220	2,967	26,428	15 40	30 80	128 75	1200 400	80 50	0.2 0.25	0.5 0.8	1.5 2
-150	94	136 148	19-42	14-35	82	24	28	M10	60	86	2	6220	2,967	26,428	50 130	65 150	155 105	2020 595	145 85	0.2 0.25	0.5 0.8	1.5 2
-200	109	146 159	22-45	22-41	90	24	31	M12	66	92	2	5720	3,611	45,831	30 90	80 200	175 116	2500 460	147 82	0.2 0.25	0.5 0.8	1.5 2
-300	119	171 182	30-60	30-50	110	30	39	M12	72	112	2	5200	5,561	92,694	60 200	150 300	502 285	6300 1400	280 145	0.2 0.25	0.5 0.8	1.5 2
-500	129	189 200	35-65	35-65	122	35	42	M12	81	118	2	4470	9,307	194,726	80 250	200 500	690 320	7790 970	100 85	0.2 0.25	0.5 1	1.5 2




Material	bellows – stainless steel hub - aluminium
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C

Safety Coupling

axial pluggable, with collet clamp

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

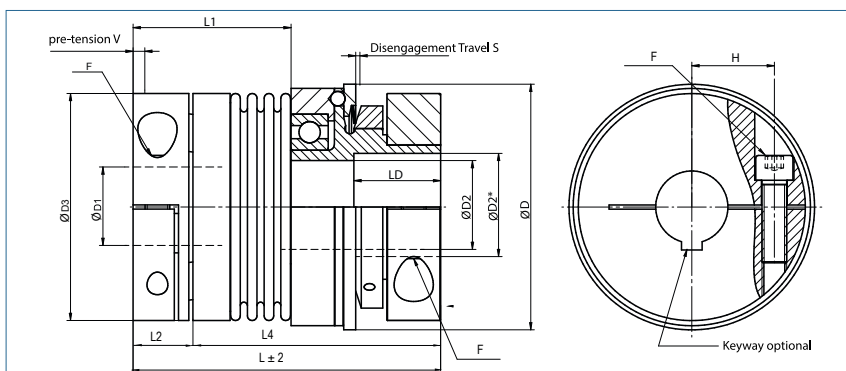**Order Code**

KBK/BKPK-60 - 121 - 16H7 - 14H7 - 20Nm - C or D - 1

Type	Size	Length	ØD1 (H7)	ØD2 (H7)	Disengagement Torque	Torque Range
------	------	--------	----------	----------	----------------------	--------------


C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data											
	ØD	L	Ø D1	Ø D2	Ø D3	H	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque Range		Spring Stiffness			Misalignment			
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max	Hub Ø		Screw ISO4762 TA (Nm)						1 TKN (Nm)	2 TKN (Nm)	torsional x10 ³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)	
-2	29	52	3-14	3-8	25	9	M3	27	0.7	13200	0,07	0,068	0.2 - 1.5	0.5 - 2	1.5	67	12	0.15	0.3	1.5	
		58	10#					33								1.3	21	11	0.20	0.4	1.5
		62						37								1.0	11	9	0.25	0.5	2
-4.5	36	64	6-16	6-13	32.5	12	M4	34	0.7	12300	0,15	0,22	1 - 3	3 - 6	6.5	168	32	0.1	0.3	1.5	
		72	11#	9#				3.5							43		4.2	41	20	0.2	0.5
-7	49	73	6-25	6-16	40	15.5	M4	42	0.7	11690	0,31	0,866	1 - 4	3 - 7	8.1	120	27	0.15	0.4	1.5	
		83	18#	11#				5.1							51		6.8	29	17	0.3	0.6
-10	49	73	6-25	6-16	40	15.5	M4	42	0.7	11690	0,31	0,866	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5	
		83	18#	11#				5.1							51		6.8	29	17	0.3	0.6
-30	64	91	10-30	10-20	56	20	M6	47	1.2	9540	0,75	3,59	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5	
		100	22#	14#				15							55		28	225	28	0.25	1
-60	79	111	12-35	12-28	66	23	M8	56	1.2	8180	1,21	8,65	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5	
		121	27#	21#				40							66		50	340	50	0.25	1



Bore	> Ø D2 and ≤ D2* only over LD
Material	bellows – stainless steel collet clamp - aluminium plug hub- aluminium
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C

	Dimensions (mm)			
	E1	L2	L3	V
KBK/BKPK 2	10	11	16	0,5
KBK/BKPK 4,5	12	13	20	0,5
KBK/BKPK 7	12	13	21	0.5-1,0
KBK/BKPK 10	12	13	21	0,5-1.0
KBK/BKPK 30	17	19	31	0.5-1.0
KBK/BKPK 60	21	23	35	0.5-1.5

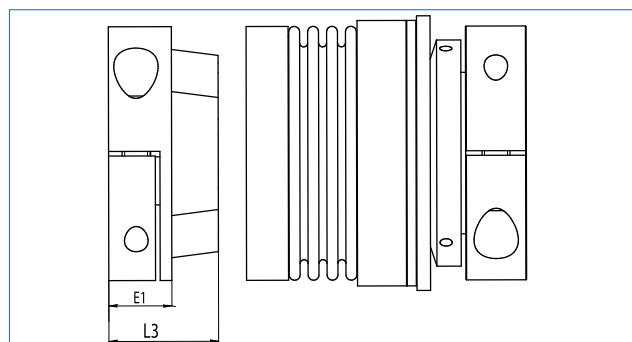


Size	2	4.5	7	10	30	60
D2*	11	X	20	20	26	31
LD	15	X	20	20	28	38

Safety Coupling

axial pluggable, with collet clamp

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

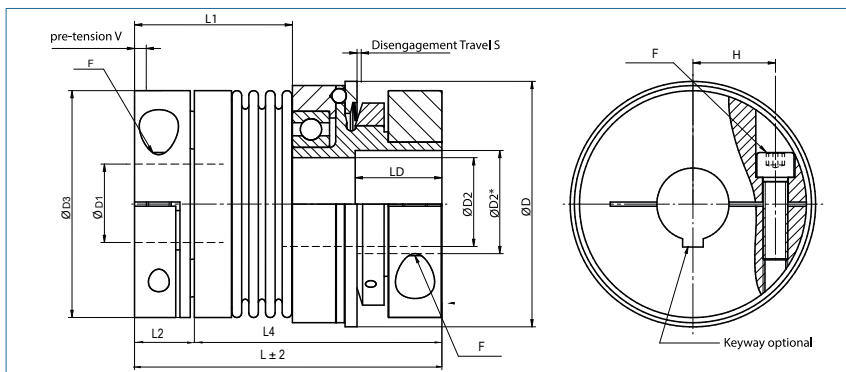

Order Code

KBK/BKPK-80 - 117 - 12H7 - 20H7 - 25Nm - C or D - 1

Type

Size

Length

ØD1 (H7)

ØD2 (H7)

Disengagement
Torque

Torque
Range


C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data										
	ØD	L	Ø D1	Ø D2	Ø D3	H	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max	Hub Ø		Screw ISO4762 TA (Nm)						1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-80	94	117	12-44	14-35	82	28	M10	61,5	2	6220	2,44	26,5	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		129	36#	27#				72					72,5		75	400	50	0.25	0.8	2
-150	94	117	14-44	14-35	82	28	M10	61,5	2	6220	2,44	26,5	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		129	36#	27#				84					72,5		105	595	85	0.25	0.8	2
-200	109	129	16-48	22-41	90	31	M12	67	2	5720	3,44	48,6	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		142	39#	33#				125					79		116	460	82	0.25	0.8	2
-300	119	149	20-60	30-50	110	39	M12	76	2	5200	4,79	91,6	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		159	50#	41#				145					87		285	1400	145	0.25	0.8	2
-500	129	182	25-70	35-56	122	42	M12	94	2	4470	7,65	178,8	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		194	58#	46#				145					105		320	970	85	0.25	1	2



Bore	> Ø D2 and ≤ D2* only over LD
Material	bellows – stainless steel collet clamp - aluminium plug hub- aluminium
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C

	Dimensions (mm)			
	E1	L2	L3	V
KBK/KBPK 80	21,5	23.5	37.5	0.5-1.5
KBK/KBPK 150	21,5	23.5	37.5	0.5-1.5
KBK/KBPK 200	24	26	42	0.5-1.5
KBK/KBPK 300	27	29	47	0.5-1.5
KBK/KBPK 500	42	44	66	0.5-2.0

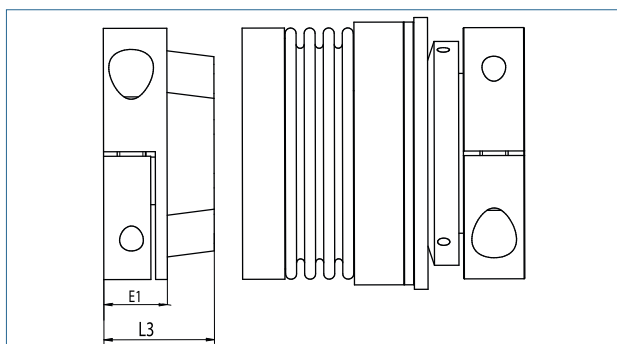


Size	80	150	200	300	500
D2*	38	38	X	57	62
LD	34	34	X	42	56

Safety Coupling

axial pluggable, with inner cone

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

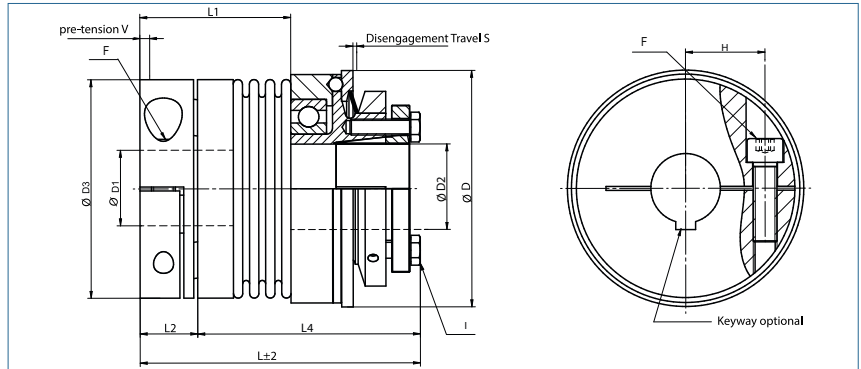

Order Code

KBK/BKPI-60 - 105 - 16H7 - 14H7 - 20Nm - C or D - 1

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data										
	ØD	L	Ø D1	Ø D2	Ø D3	H	F	L1	I	S	max. speed (t/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max	Hub Ø		Screw ISO4762 TA (Nm)		Screw ISO4017 TA (Nm)					1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	73	6-25	6-14	40	15.5	M4	42	M3	0.7	11690	0,30	0,83	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		83	18#	10#			4,5	52	2.1							6.8	29	17	0.3	0.6	2
-30	64	84	10-30	12-20	56	20	M6	47	M5	1.2	9540	0,67	3,21	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		93	22#	14#			15	55	6							28	225	28	0.25	1	2
-60	79	96	12-35	15-25	66	23	M8	56	M6	1.2	8180	1,15	7,90	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		106	27#	18#			40	66	8.5							50	340	50	0.25	1	2
-80	94	110	14-44	20-35	82	28	M10	62	M6	2	6220	1,89	20,61	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		122	36#	27#			72	73	14							75	400	50	0.25	0.8	2
-150	94	110	19-44	20-35	82	28	M10	62	M6	2	6220	1,89	20,61	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		122	36#	27#			84	73	14							105	595	85	0.25	0.8	2
-200	109	117	22-48	20-40	90	31	M12	67	M6	2	5720	2,54	26,63	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		126	39#	32#			125	79	14							116	460	82	0.25	0.8	2
-300	119	140	20-60	25-45	110	39	M12	76	M8	2	5200	3,84	69,77	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		150	50#	37#			145	87	18							285	1400	145	0.25	0.8	2
-500	129	164	25-70	35-55	122	42	M12	94	M8	2	4470	5,13	118,22	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		175	58#	45#			145	105	26							320	970	85	0.25	1	2



Material


bellows – stainless steel
inner cone - steel
plug hub- aluminium

Keyway

optional acc. DIN 6885
biggest bore marked with a #

Temperature Range

-30 °C ~ 120 °C

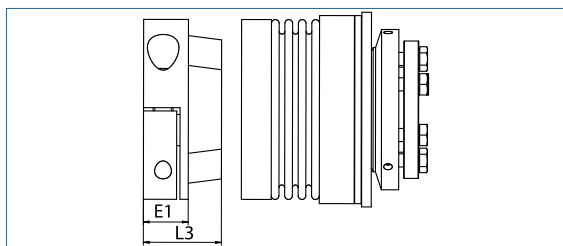


	Dimensions (mm)			
	E1	L2	L3	V
KBK/BKPI 10	12	13	21	0.5-1.0
KBK/BKPI 30	17	19	31	0.5-1.0
KBK/BKPI 60	21	23	35	0.5-1.5
KBK/BKPI 80	21.5	23.5	37.5	0.5-1.5
KBK/BKPI 150	21.5	23.5	37.5	0.5-1.5
KBK/BKPI 200	24	26	42	0.5-1.5
KBK/BKPI 300	27	29	47	0.5-1.5
KBK/BKPI 500	42	44	66	0.5-2.0

Safety Coupling

axial pluggable, with outer cone

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

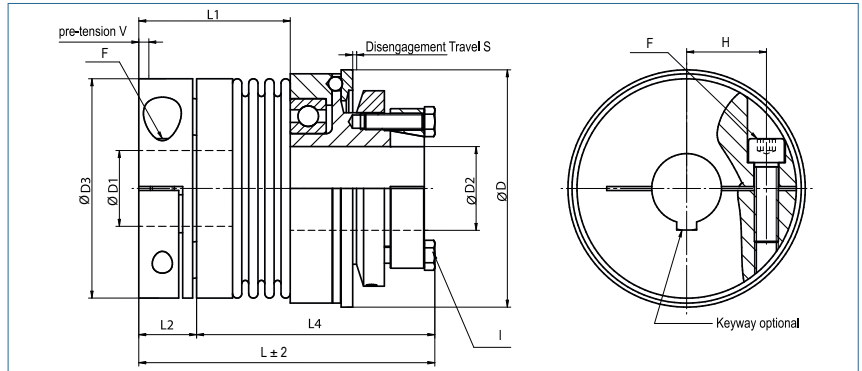

Order Code

KBK/BKPA-60 - 104 - 20H7 - 25H7 - 20Nm - C or D - 1

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data										
	ØD	L	Ø D1	Ø D2	Ø D3	H	F	L1	I	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max	Narben- durch- messer		Screw ISO4762 TA (Nm)		Screw ISO4017 TA (Nm)					1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	75	6-25	5-12	40	15.5	M4	42	M3	0.7	11690	0,32	0,85	3 -	5 -	8.1	120	27	0.15	0.4	1.5
		85	18#	8#			5.1	51	2.1					6.8	29	17	0.3	0.6	2		
-30	64	88	10-30	12-20	56	20	M6	47	M5	1.2	9540	0,72	3,38	5 -	10 -	38	720	50	0.15	0.6	1.5
		97	22#	14#			15	55	5.9					28	225	28	0.25	1	2		
-60	79	104	12-35	15-25	66	23	M8	56	M5	1.2	8180	1,22	8,79	12 -	20 -	75	1150	90	0.15	0.6	1.5
		114	27#	18#			40	66	8.7					50	340	50	0.25	1	2		
-80	94	119	14-44	20-35	82	28	M10	62	M6	2	6220	2,11	22,71	15 -	30 -	128	1200	80	0.2	0.5	1.5
		130	36#	27#			72	73	15					75	400	50	0.25	0.8	2		
-150	94	119	19-44	20-35	82	28	M10	62	M6	2	6220	2,11	22,71	50 -	65 -	155	2020	145	0.2	0.5	1.5
		130	36#	27#			84	73	15					105	595	85	0.25	0.8	2		
-200	109	126	22-48	20-42	90	31	M12	67	M6	2	5720	2,8	39,44	30 -	80 -	175	2500	147	0.2	0.5	1.5
		139	39#	34#			125	79	15					116	460	82	0.25	0.8	2		
-300	119	149	20-60	25-50	110	39	M12	76	M8	2	5200	3,8	70,27	60 -	150 -	502	6300	280	0.2	0.5	1.5
		159	50#	41#			145	87	25					285	1400	145	0.25	0.8	2		
-500	129	178	25-70	35-55	122	42	M12	94	M8	2	4470	5,85	130,63	80 -	200 -	690	7790	100	0.2	0.5	1.5
		189	58#	45#			145	105	36					320	970	85	0.25	1	2		



Material

outer cone -steel
bellows – stainless steel
plug hub- aluminium


Keyway

optional acc. DIN 6885
biggest bore marked with a #

Temperature Range

-30 °C ~ 120 °C

	Dimensions (mm)			
	E1	L2	L3	V
KBK/KBPA 10	12	13	21	0.5-1.0
KBK/KBPA 30	17	19	31	0.5-1.0
KBK/KBPA 60	21	23	35	0.5-1.5
KBK/KBPA 80	21.5	23.5	37.5	0.5-1.5
KBK/KBPA 150	21.5	23.5	37.5	0.5-1.5
KBK/KBPA 200	24	26	42	0.5-1.5
KBK/KBPA 300	27	29	47	0.5-1.5
KBK/KBPA 500	42	44	66	0.5-2.0

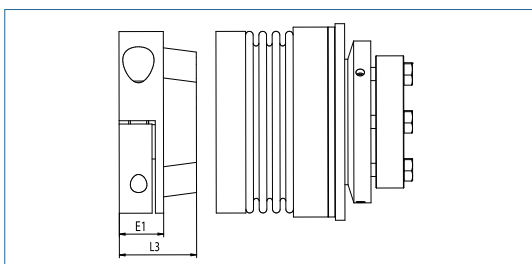


Safety Coupling

with inner cone and collet clamp

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

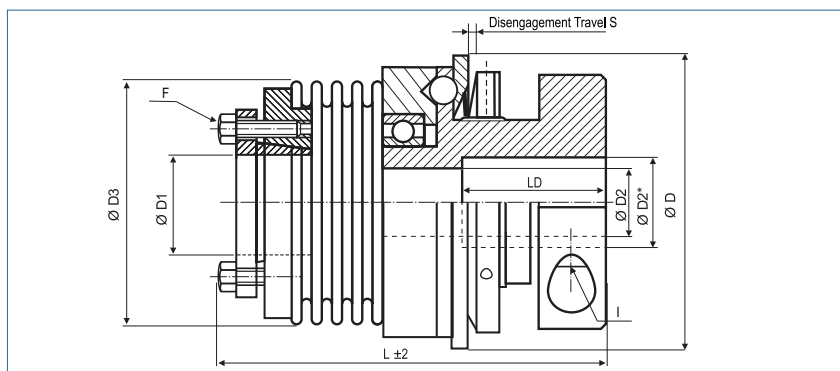

Order Code

KBK/BIK - 60 - 107 - 15H7 - 18H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range
C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data										
	ØD	L	ØD1	ØD2	ØD3	F	I	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max		Screw ISO4017 TA (Nm)	Screw ISO4762 TA (Nm)					1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	68	6-14	6-16	40.5	M3	M4	0.7	11650	0.27	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		78	10#	11#		2.1	5.1												
-30	64	79	12-20	10-20	56	M5	M6	1.2	9540	0.81	3.3	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		88	14#	14#		6	15												
-60	79	97	15-25	12-28	66	M6	M8	1.2	8180	1.48	9	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		107	18#	21#		8.5	36												
-80	94	107	20-35	14-35	82	M6	M10	2	6220	3.2	28	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		119	27#	27#		14	72												
-150	94	107	20-35	14-35	82	M6	M10	2	6220	3.2	28	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		119	27#	27#		14	72												
-200	109	114	20-40	22-41	90	M6	M12	2	5720	3.9	46	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		127	32#	33#		14	125												
-300	119	133	25-50	30-50	110	M8	M12	2	5200	6.1	92	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		143	41#	41#		18	125												
-500	129	147	35-55	35-56	122	M8	M12	2	4470	8.4	150	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		158	45#	46#		26	125												



Bores	> Ø D2 and ≤ D2* only over LD
Material	bellows – stainless steel inner cone - steel collet clamp - aluminium; from Size 80 - steel
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C


Size	2	45	7	10	30	60	80	150	200	300	500
D2*	11	X	20	20	26	31	38	38	X	57	62
LD	15	X	20	20	28	38	34	34	X	42	56

Safety Coupling

with two inner cones

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

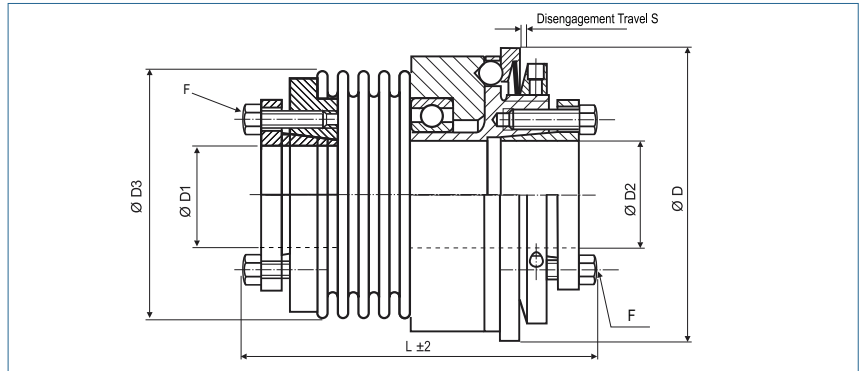

Order Code

KBK/BII - 60 - 100 - 15H7 - 18H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)							Technical Data										
	ØD	L	ØD1	ØD2	ØD3	F	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max		Screw ISO4017 TA (Nm)					1 TKN (Nm)	2 TKN (Nm)	torsional x10 ³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	68	6-14	6-14	40.5	M3	0.7	11650	0.27	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		78	10#	10#		2.1							6.8	29	17	0.3	0.6	2
-30	64	85	12-20	12-20	56	M5	1.2	9540	0.76	3.1	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		94	14#	14#		6							28	225	28	0.25	1	2
-60	79	100	15-25	15-25	66	M6	1.2	8180	1.44	8.8	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		110	18#	18#		8.5							50	340	50	0.25	1	2
-80	94	115	20-35	20-35	82	M6	2	6220	2.5	22	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		128	27#	27#		14							75	400	50	0.25	0.8	2
-150	94	115	20-35	20-35	82	M6	2	6220	2.5	22	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		128	27#	27#		14							105	595	85	0.25	0.8	2
-200	109	125	20-40	20-40	90	M6	2	5720	2.88	34	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		135	32#	32#		14							116	460	82	0.25	0.8	2
-300	119	135	25-50	25-45	110	M8	2	5200	5.0	75	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		145	41#	37#		18							285	1400	145	0.25	0.8	2
-500	129	150	35-55	35-55	122	M8	2	4470	6.73	120	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		162	45#	45#		26							320	970	85	0.25	1	2
-800	169	235	50-70	50-70	157	M16	2	3350	17.8	518	240 - 600	500 - 800	700	500	185	0.2	0.8	1.8
			58#	58#		45												
-1400	169	235	50-70	50-70	157	M16	2	3350	18.0	523	360 - 1000	900 - 1400	1270	700	275	0.2	0.8	1.8
			58#	58#		80												



Material

bellows – stainless steel
inner cone – steel

Keyway

optional acc. DIN 6885
biggest bore marked with a #

Temperature Range


-30 °C ~ 120 °C

Safety Coupling

with inner cone and outer cone

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

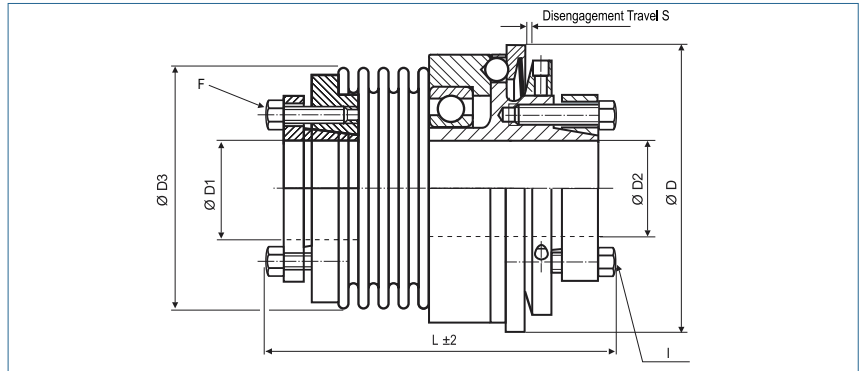

Order Code

KBK/BIA - 60 - 100 - 15H7 - 18H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data										
	ØD	L	ØD1	ØD2	ØD3	F	S	I	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw ISO4017 TA (Nm)		Screw ISO4017 TA (Nm)				1 TKN (Nm)	2 TKN (Nm)	torsional x10 ³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	69	6-14	5-14	40.5	M3	0.7	M3	11650	0.27	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		79	10#	10#		2.1		2.1						6.8	29	17	0.3	0.6	2
-30	64	74	12-20	12-20	56	M5	1.2	M5	9540	0.75	3.1	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		83	14#	14#		6		5.9						28	225	28	0.25	1	2
-60	79	89	15-25	15-25	66	M6	1.2	M5	8180	1.43	8.8	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		100	18#	18#		8.5		8.7						50	340	50	0.25	1	2
-80	94	108	20-35	20-35	82	M6	2	M6	6220	2.5	22	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		120	27#	27#		14		15						75	400	50	0.25	0.8	2
-150	94	108	20-35	20-35	82	M6	2	M6	6220	2.5	22	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		120	27#	27#		14		15						105	595	85	0.25	0.8	2
-200	109	110	20-40	20-42	90	M6	2	M6	5720	2.9	34	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		123	32#	34#		14		15						116	460	82	0.25	0.8	2
-300	119	132	25-50	25-50	110	M8	2	M8	5200	4.9	73	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		143	41#	41#		18		25						285	1400	145	0.25	0.8	2
-500	129	149	35-55	35-55	122	M8	2	M8	4470	6.8	120	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		160	45#	45#		26		36						320	970	85	0.25	1	2
-800	169	243	50-70	50-70	157	M16	2	M12	3350	18	516	240 - 600	500 - 800	700	500	185	0.2	0.8	1.8
			58#	58#		45		85											
-1400	169	243	50-70	50-70	157	M16	2	M12	3350	18	520	360 - 1000	900 - 1400	1270	700	275	0.2	0.8	1.8
			58#	58#		80		115											



Material

outer cone - steel
bellows – stainless steel
inner cone - steel

Keyway

optional acc. DIN 6885
biggest bore marked with a #

Temperature Range


-30 °C ~ 120 °C

Safety Coupling

with outer cone and collet clamp

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

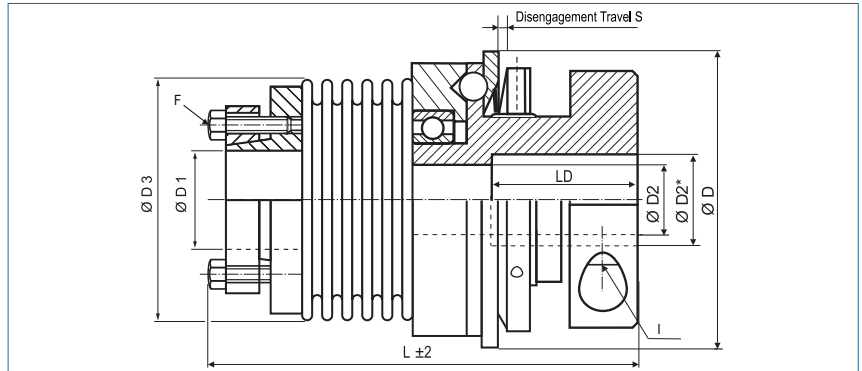

Order Code

KBK/BAK - 60 - 115 - 15H7 - 18H7 - 20Nm - C or D - 2

Type

Size

Length

ØD1 (H7)

ØD2 (H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data										
	ØD	L	ØD1	ØD2	ØD3	F	S	I	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max		Screw ISO4017 TA (Nm)		Screw ISO4762 TA (Nm)				1 TKN (Nm)	2 TKN (Nm)	torsional x10³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	65	5-14	6-16	40.5	M3	0.7	M4	11650	0.27	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		74	10#	11#		2.1		5.1						6.8	29	17	0.3	0.6	2
-30	64	82	12-20	10-20	56	M5	1.2	M6	9540	0.80	3.3	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		92	14#	14#		5.9		15						28	225	28	0.25	1	2
-60	79	104	15-32	12-28	66	M5	1.2	M8	8180	1.46	8.9	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		115	24#	21#		8.7		36						50	340	50	0.25	1	2
-80	94	115	20-35	14-35	82	M6	2	M10	6220	3.3	29	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		127	37#	37#		15		72						75	400	50	0.25	0.8	2
-150	94	115	20-35	14-35	82	M6	2	M10	6220	3.3	29	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		127	37#	37#		15		72						105	595	85	0.25	0.8	2
-200	109	122	20-42	22-41	90	M6	2	M12	5720	3.9	46	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		135	34#	33#		15		125						116	460	82	0.25	0.8	2
-300	119	141	25-50	30-50	110	M8	2	M12	5200	5.9	88	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		152	41#	41#		25		125						285	1400	145	0.25	0.8	2
-500	129	163	35-55	35-56	122	M8	2	M12	4470	8.5	151	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		175	45#	46#		36		125						320	970	85	0.25	1	2




Bores	> Ø D2 and ≤ D2* only over LD
Material	outer cone - steel bellows - stainless steel collet clamp - aluminium; from size 80 steel
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C

Size	2	45	7	10	30	60	80	150	200	300	500
D2*	11	X	20	20	26	31	38	38	X	57	62
LD	15	X	20	20	28	38	34	34	X	42	56

Safety Coupling

with outer cone and inner cone

 optional
nickel-plated version
optional full stainless
steel version

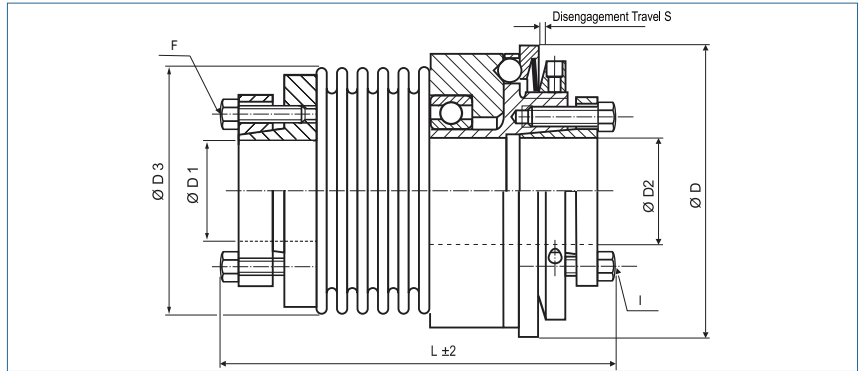 optional
laserwelded


Order Code

KBK/BAI - 60 - 100 - 15H7 - 18H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data										
	ØD	L	ØD1	ØD2	ØD3	F	S	I	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw ISO4017 TA (Nm)		Screw ISO4017 TA (Nm)				1 TKN (Nm)	2 TKN (Nm)	torsional x10 ³ CT (Nm/rad)	radial CR (N/mm)	axial CA (N/mm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-10	49	65	5-14	6-14	40.5	M3	0.7	M3	11650	0.27	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		74	10#	10#		2.1		2.1											
-30	64	75	12-20	12-20	56	M5	1.2	M5	9540	0.75	3.1	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		84	14#	14#		5.9		6											
-60	79	89	15-32	15-25	66	M5	1.2	M6	8180	1.42	8.7	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		100	24#	18#		8.7		8.5											
-80	94	108	20-35	20-35	82	M6	2	M6	6220	2.6	23	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		120	27#	27#		15		14											
-150	94	108	20-35	20-35	82	M6	2	M6	6220	2.6	23	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		120	27#	27#		15		14											
-200	109	110	20-42	20-40	90	M6	2	M6	5720	2.9	34	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		123	34#	32#		15		14											
-300	119	133	25-50	25-45	110	M8	2	M8	5200	4.8	72	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		143	41#	37#		25		18											
-500	129	145	35-55	35-55	122	M8	2	M8	4470	6.8	121	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		157	45#	45#		36		26											
-800	169	242	50-70	50-70	157	M12	2	M16	3350	17.8	515	240 - 600	500 - 800	700	500	185	0.2	0.8	1.8
			58#	58#		85		45											
-1400	169	242	50-70	50-70	157	M12	2	M16	3350	17.9	519	360 - 1000	900 - 1400	1270	700	275	0.2	0.8	1.8
			58#	58#		115		80											



Material

 outer cone: steel
bellows – stainless steel
inner cone: steel

Keyway

 optional acc. DIN 6885
biggest bore marked with a #

Temperature Range


-30 °C ~ 120 °C

Safety Coupling

with two outer cones

optional
nickel-plated version
optional full stainless
steel version

optional
laserwelded

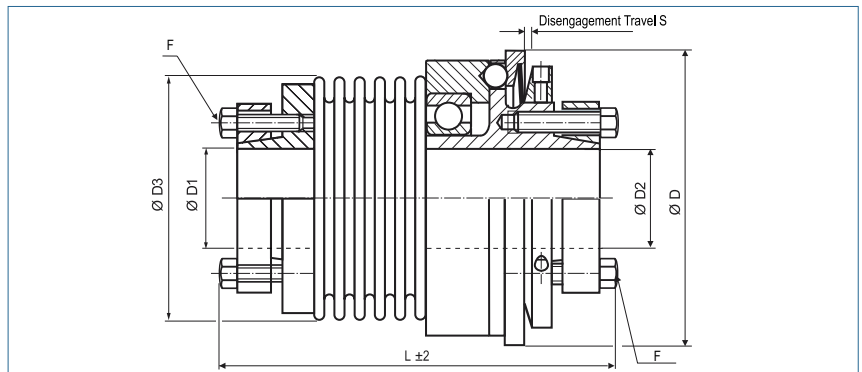

Order Code

KBK/BAA - 60 - 108 - 15H7 - 18H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range
C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data									
	ØD	L	ØD1	ØD2	ØD3	F	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque Range		Spring Stiffness			Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max		Screw ISO4017 TA (Nm)												
-10	49	66	5-14	5-14	40.5	M3	0.7	11650	0.27	0.6	3 - 7	5 - 10	8.1	120	27	0.15	0.4	1.5
		75	10#	10#		2.1												
-30	64	78	12-20	12-20	56	M5	1.2	9540	0.74	3.0	5 - 15	10 - 30	38	720	50	0.15	0.6	1.5
		87	14#	14#		5.9												
-60	79	97	15-32	15-25	66	M5	1.2	8180	1.41	8.6	12 - 35	20 - 60	75	1150	90	0.15	0.6	1.5
		108	24#	18#		8.7												
-80	94	116	20-35	20-35	82	M6	2	6220	2.6	23	15 - 40	30 - 80	128	1200	80	0.2	0.5	1.5
		129	27#	27#		15												
-150	94	116	20-35	20-35	82	M6	2	6220	2.6	23	50 - 130	65 - 150	155	2020	145	0.2	0.5	1.5
		129	27#	27#		15												
-200	109	118	20-42	20-42	90	M6	2	5720	2.9	35	30 - 90	80 - 200	175	2500	147	0.2	0.5	1.5
		132	34#	34#		15												
-300	119	141	25-50	25-50	110	M8	2	5200	4.6	70	60 - 200	150 - 300	502	6300	280	0.2	0.5	1.5
		152	41#	41#		25												
-500	129	159	35-55	35-55	122	M8	2	4470	6.8	121	80 - 250	200 - 500	690	7790	100	0.2	0.5	1.5
		171	45#	45#		36												
-800	169	250	50-70	50-70	157	M12	2	3350	17.7	514	240 - 600	500 - 800	700	500	185	0.2	0.8	1.8
			58#	58#		85												
-1400	169	250	50-70	50-70	157	M12	2	3350	17.8	516	360 - 1000	900 - 1400	1270	700	275	0.2	0.8	1.8
			58#	58#		115												



Material	outer cone - steel bellows – stainless steel
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C

Safety Couplings with elastomer inserts

KBK|EPP -14 ~ 42

Safety Coupling
with two keyways



P. 38

KBK|EPK -14 ~ 42

Safety Coupling
with keyway and collet clamp



P. 39

KBK|EPI -14 ~ 42

Safety Coupling
with keyway and inner cone



P. 40

KBK|EPA -14 ~ 42

Safety Coupling
with keyway and outer cone



P. 41

KBK|EKP -14 ~ 42

Safety Coupling
with collet clamp and keyway



P. 42

KBK|EKK -14 ~ 42

Safety Coupling
with two collet clamps



P. 43

KBK|EKI -14 ~ 42

Safety Coupling
with collet clamp and inner cone



P. 44

KBK|EKA -14 ~ 42

Safety Coupling
with collet clamp and outer cone



P. 45

KBK|EHH -14 ~ 42

Safety Coupling
with split hubs



P. 46

KBK|EAP -14 ~ 42

Safety Coupling
with outer cone and keyway



P. 47

KBK|EAK -14 ~ 42

Safety Coupling
with outer cone and collet clamp



P. 48

KBK|EAI -14 ~ 42

Safety Coupling
with outer cone and inner cone



P. 49

Safety Couplings with elastomer inserts

KBK|EAA -14 ~ 42

Safety Coupling
with two outer cones




P. 50

Safety Coupling

with two keyways

optional
nickel-plated version
optional full stainless
steel version

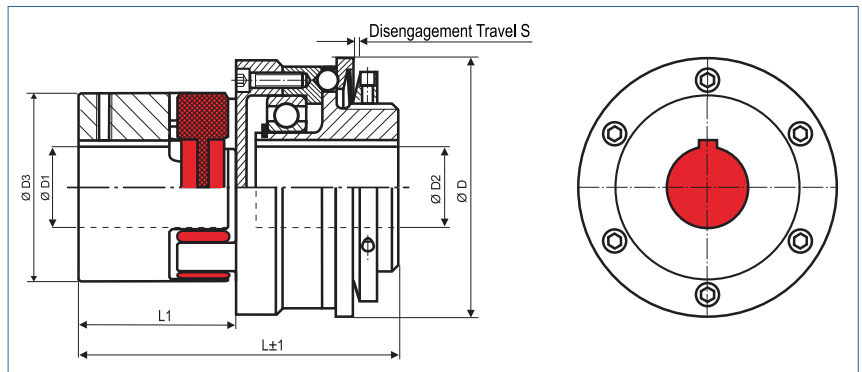

Order Code

KBK/EPP - 24 - 98.5 - N16H7 - N15H7 - 20Nm - C or D - 2

Type

Size

Length

ØD1
(H7)

ØD2
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)							Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max								1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	55	6-16	6-12	30	24	0.7	11690	0.19	0.5	12.5	3-7	5-10	0.09	+1.0 -0.5	0.9
-19	64	81	10-24	10-16	40	41	1.2	8950	0.63	2.6	17	5-15	10-30	0.06	+1.2 -0.5	0.9
-24	79	98.5	16-28	15-24	55	50	1.2	7630	1.1	6.8	60	12-35	20-60	0.10	+1.4 -0.5	0.9
-28	94	121	20-38	19-29	65	59	2	6030	2	17	160	50-130	65-150	0.11	+1.5 -0.7	0.9
-38	119	134	20-45	20-42	80	67	2	4980	3.8	57	325	60-200	150-300	0.12	+1.8 -0.7	0.9
-42	129	157	20-55	20-50	95	76	2	4440	7.9	140	450	80-250	200-500	0.14	+2.0 -1.0	0.9



Material

hubs: aluminium
spider element: polyurethane 98 Sh A (red)


Temperature Range

-30 °C ~ 90 °C

Safety Coupling

with keyway and collet clamp

optional
nickel-plated version
optional full stainless
steel version

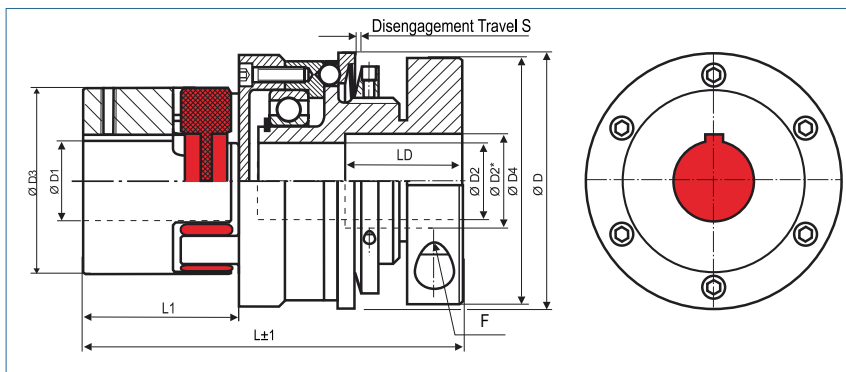

Order Code

KBK/EPK - 24 - 126.5 - N16H7 - 14H7 - 20Nm - C or D - 2

Type

Size

Length

ØD1
(H7)

ØD2
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	Ø D4	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max			Screw ISO4762 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	65	6-16	6-16	30	40.5	M4 5.1	24	0.7	11690	0.22	0.5	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	100	10-24	10-20 14#	40	56	M6 15	41	1.2	8950	0.77	3.2	17	5 - 15	10 - 30	0.06	+1.2 -0.5	0.9
-24	79	126.5	16-28	12-28 21#	55	66	M8 36	50	1.2	7630	1.34	8.2	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
-28	94	142	20-38	14-35 27#	65	82	M10 72	59	2	6030	3	26	160	50 - 130	65 - 150	0.11	+1.5 -0.7	0.9
-38	119	160	20-45	30-50 41#	80	110	M12 125	67	2	4980	5.7	86	325	60 - 200	150 - 300	0.12	+1.8 -0.7	0.9
-42	129	195	20-55	35-56 46#	95	122	M12 125	76	2	4440	10.5	186	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9




Bores	> Ø D2 and ≤ D2* only over LD
Material	hubs: aluminium spider element: polyurethane 98 Sh A (red)
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 90 °C

Size	14	19	24	28	38	42
D2*	20	26	31	38	57	62
LD	20	28	38	34	42	56

Safety Coupling

with keyway and inner cone

optional
nickel-plated version
optional full stainless
steel version

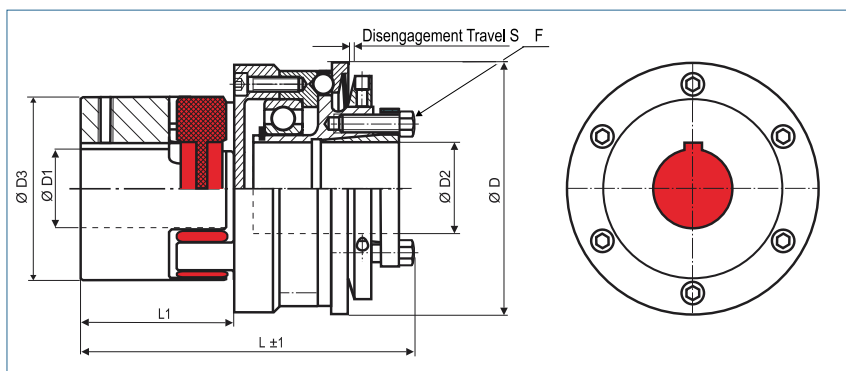

Order Code

KBK/EPI - 24 - 111.5 - N16H7 - 15H7 - 20Nm - C or D - 2

Type

Size

Length

Ø D1
(H7)

Ø D2
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data								
	Ø D	L	Ø D1	Ø D2	Ø D3	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max		Screw ISO4017 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	65	6-16	6-14 10#	30	M3 2.1	24	0.7	11690	0.22	0.5	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	93	10-24	12-20 14#	40	M5 6	41	1.2	8950	0.72	2.9	17	5 - 15	10 - 30	0.06	+1.2 -0.5	0.9
-24	79	111.5	16-28	15-25 18#	55	M6 8.5	50	1.2	7630	1.3	7.9	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
-28	94	135	20-38	20-35 27#	65	M6 14	59	2	6030	2.28	20	160	50 - 130	65 - 150	0.11	+1.5 -0.7	0.9
-38	119	151	20-45	25-50 41#	80	M8 20	67	2	4980	4.6	69	325	60 - 200	150 - 300	0.12	+1.8 -0.7	0.9
-42	129	175	20-55	35-55 45#	95	M8 26	76	2	4440	8.75	156	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9



Material

inner cone: steel
hubs: aluminium
spider element: polyurethane 98 Sh A (red)

Keyway

optional acc. DIN 6885
biggest bore marked with a #


Temperature Range

-30 °C ~ 90 °C

Safety Coupling

with keyway and outer cone

optional
nickel-plated version
optional full stainless
steel version

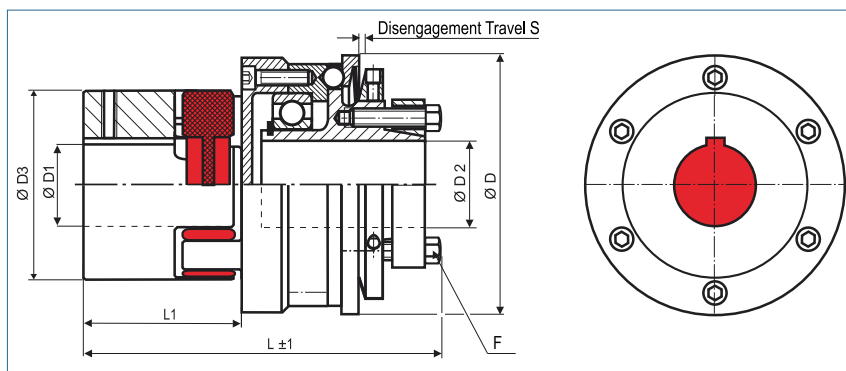

Order Code

KBK/EPA - 24 - 119.5 - N16H7 - 15H7 - 20Nm - C or D - 2

Type

Size

Length

ØD1
(H7)

ØD2
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) von ~bis		Screw ISO4017 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	67	6-16	5-14 10#	30	M3 2.1	24	0.7	11690	0.22	0.5	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	96	10-24	12-20 14#	40	M5 5.9	41	1.2	8950	0.71	2.9	17	5 - 15	10 - 30	0.06	+1.2 -0.5	0.9
-24	79	119.5	16-28	15-25 18#	55	M5 8.7	50	1.2	7630	1.29	7.9	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
-28	94	144	20-38	20-35 27#	65	M6 15	59	2	6030	2.3	20.4	160	50 - 130	65 - 150	0.11	+1.5 -0.7	0.9
-38	119	160	20-45	25-50 41#	80	M8 25	67	2	4980	4.5	67.3	325	60 - 200	150 - 300	0.12	+1.8 -0.7	0.9
-42	129	189	20-55	35-55 45#	95	M8 36	76	2	4440	8.8	156.1	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9



Material

outer cone: steel
hubs: aluminium
spider element: polyurethane 98 Sh A (red)

Keyway

optional acc. DIN 6885
biggest bore marked with a #


Temperature Range

-30 °C ~ 90 °C

Safety Coupling

with collet clamp and keyway

optional
nickel-plated version
optional full stainless
steel version

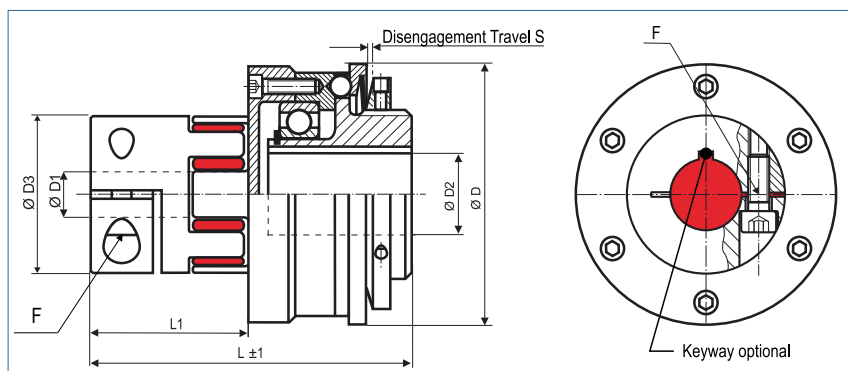

Order Code

KBK/EKP - 24 - 98.5 - 16H7 - N15H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range
C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw (ISO4762) TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	55	4-16	6-12	30	M3 1.4	24	0.7	11690	0.21	0.5	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	81 73	10-22	10-16	40	M6/11 M6/11	41 33	1.2	8950	0.65	2.7	17	5 - 15	10 - 30	0.06	+1.2 -0.5	0.9
-24	79	98.5 88.5	15-32	15-24	55	M6/11 M6/11	50 40	1.2	7630	1.24	7.6	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
-28	94	121 107	19-38	19-29	65	M8/25 M8/25	59 45	2	6030	2.1	18	160	50 - 130	65 - 150	0.11	+1.5 -0.7	0.9
-38	119	134 120	20-45	20-42	80	M8/25 M10/49	67 53	2	4980	3.8	57	325	60 - 200	150 - 300	0.12	+1.8 -0.7	0.9
-42	129	157	28-45	20-50	95	M10 70	76	2	4440	5.9	104	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9




Material	collet clamp: aluminium spider element: polyurethane 98 Sh A (red)
Hub Style	size 14 and 19: single slit** size 24, 28, 38 and 42: double slit ** short lengths are automatically with single slits
Keyway	optional acc. DIN 6885
Temperature Range	-30 °C ~ 90 °C

Safety Coupling

with two collet clamps

optional
nickel-plated version
optional full stainless
steel version

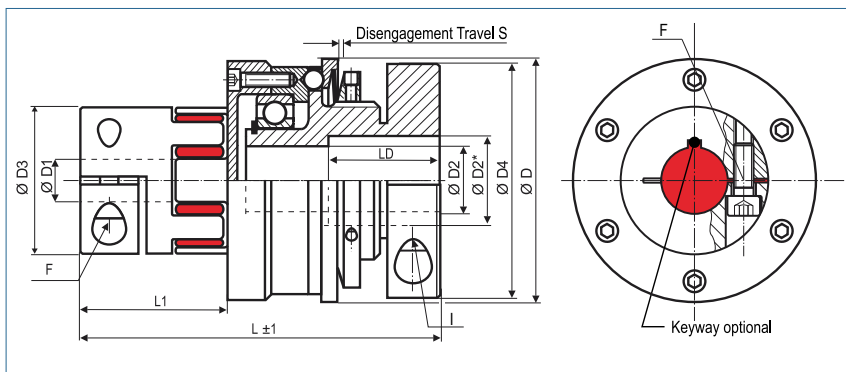

Order Code

KBK/EKK - 24 - 126.5 - 16H7 - 14H7 - 20Nm - C or D - 2

Type

Size

Length

ØD1
(H7)

ØD2
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	Ø D4	F	I	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max			Screw ISO4762 TA (Nm)	Screw ISO4762 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	65	4-16	6-16 11#	30	40.5	M3 1.4	M4 5.1	24	0.7	11690	0.24	0.6	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	100 92	10-22	10-20 14#	40	56	M6/11 M6/11	M6 15	41 33	1.2	8950	0.79	3.2	17	5 - 15	10 - 30	0.06	+1.2 -0.5	0.9
-24	79	126.5 116.5	15-32	12-28 21#	55	66	M6/11 M6/11	M8 36	50 40	1.2	7630	1.46	8.9	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
-28	94	142 128	19-38	14-35 27#	65	82	M8/25 M8/25	M10 72	59 45	2	6030	3.1	27	160	50 - 130	65 - 150	0.11	+1.5 -0.7	0.9
-38	119	160 146	20-45	30-50 41#	80	110	M8/25 M10/49	M12 125	67 59	2	4980	5.7	86	325	60 - 200	150 - 300	0.12	+1.8 -0.7	0.9
-42	129	195	28-45	35-56 46#	95	122	M10 70	M12 125	76	2	4440	8.5	150	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9




Bores	> Ø D2 and ≤ D2* only over LD
Material	collet clamp: aluminium spider element: polyurethane 98 Sh A (red)
Hub Style	size 14 and 19: single slit** size 24, 28, 38 and 42: double slit ** short lengths are automatically with single slits
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 90 °C

Size	14	19	24	28	38	42
D2*	20	26	31	38	57	62
LD	20	28	38	34	42	56

Safety Coupling

with collet clamp and inner cone

optional
nickel-plated version
optional full stainless
steel version

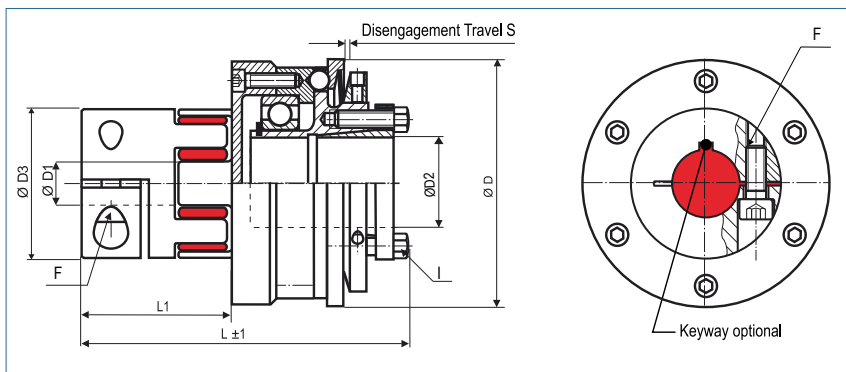

Order Code

KBK/EKI - 24 - 111.5 - 16H7 - 15H7 - 20Nm - C or D - 2

Type

Size

Length

ØD1
(H7)

ØD2
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	F	I	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw ISO4762 TA (Nm)	Screw ISO4017 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	65	4-16	6-14 10#	30	M3 1.4	M3 2.1	24	0.7	11690	0.24	0.6	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	93	10-22	12-20	40	M6/11	M5	41	1.2	8950	0.74	3.0	17	5 - 15	10 - 30	0.06	+1.2	0.9
		85		14#		M6/11	6	33									-0.5	
-24	79	111.5	15-32	15-25	55	M6/11	M6	50	1.2	7630	1.42	8.7	60	12 - 35	20 - 60	0.10	+1.4	0.9
		101.5		18#		M6/11	8.5	40									-0.5	
-28	94	135	19-38	20-35	65	M8/25	M6	59	2	6030	2.4	21	160	50 - 130	65 - 150	0.11	+1.5	0.9
		121		27#		M8/25	14	45									-0.7	
-38	119	151	20-45	25-50	80	M8/25	M8	67	2	4980	4.6	69	325	60 - 200	150 - 300	0.12	+1.8	0.9
		137		41#		M10/49	20	53									-0.7	
-42	129	175	28-45	35-55	95	M10	M8	76	2	4440	6.7	120	450	80 - 250	200 - 500	0.14	+2.0	0.9
				45#		70	26	76									-1.0	



Material

inner cone: steel
collet clamp: aluminium
spider element: polyurethane 98 Sh A (red)

Hub Style

size 14 and 19: single slit**
size 24, 28, 38, 42: double slit
** short lengths are automatically with single slits

Keyway

optional acc. DIN 6885
biggest bore marked with a #


Temperature Range

-30 °C ~ 90 °C

Safety Coupling

with collet clamp and outer cone

optional
nickel-plated version
optional full stainless
steel version

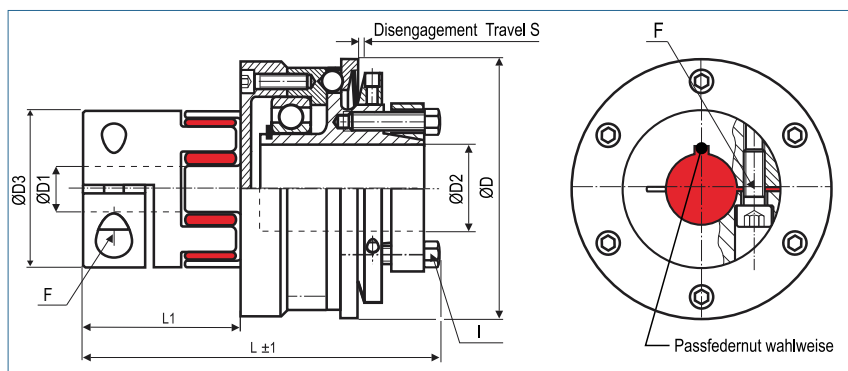

Order Code

KBK/EKA - 24 - 119.5 - 16H7 - 14H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	F	I	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw ISO4762 TA (Nm)	Screw ISO4017 TA (Nm)		1 TKN (Nm)					2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)	
-14	49	67	4-16	5-14 10#	30	M3 1.4	M3 2.1	24	0.7	11690	0.24	0.6	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	96 88	10-22	12-20 14#	40	M6/11 M6/11	M5 5.9	41 33	1.2	8950	0.73	3.0	17	5 - 15	10 - 30	0.06	+1.2 -0.5	0.9
-24	79	119.5 109.5	15-30	15-25 18#	55	M6/11 M6/11	M5 8.7	50 40	1.2	7630	1.41	8.6	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
-28	94	144 130	19-38	20-35 27#	65	M8/25 M8/25	M6 15	59 45	2	6030	2.4	21	160	50 - 130	65 - 150	0.11	+1.5 -0.7	0.9
-38	119	160 146	20-45	25-50 41#	80	M8/25 M10/49	M8 25	67 53	2	4980	4.5	67	325	60 - 200	150 - 300	0.12	+1.8 -0.7	0.9
-42	129	189	28-45	35-55 45#	95	M10 70	M8 36	76	2	4440	6.8	120	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9




Material	outer cone: steel collet clamp: aluminium spider element: polyurethane 98 Sh A (red)
Hub Style	size 14 and 19: single slit** size 24, 28, 38, 42: double slit ** short lengths are automatically with single slits
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 90 °C

Safety Coupling

with split hubs

optional
nickel-plated version
optional full stainless
steel version

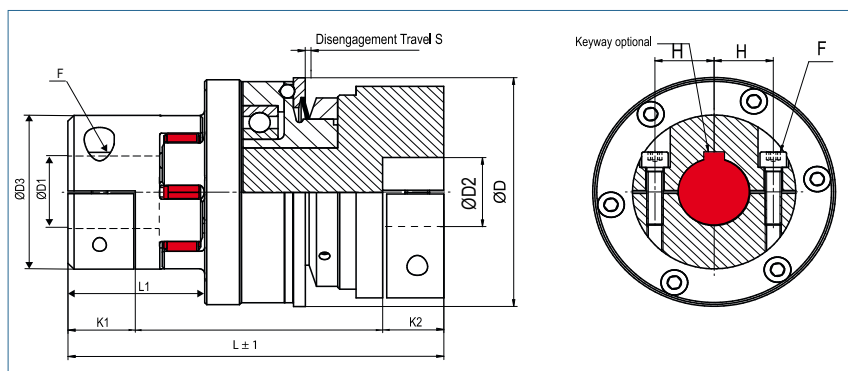

Order Code

KBK/EHH - 24 - 136 - 20H7 - 30H7 - 20Nm - C or D - 1

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)											Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	K1 K2	F	I	L1	S	W	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max			Screw (ISO4762) TA (Nm)	Screw (ISO4762) TA (Nm)								1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	73	4-14	6-25	30	8 9	M4 5	M4 4,5	24	0.7	56	11690	0,39	1,2	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	112	8-20	10-32	40	19	M6	M6	40	1.2	75	8950	0,98	4,3	17	5 - 15	10 - 30	0.06	+1.2	0.9
				30*		17	10	15											-0.5	
-24	79	136	10-28	12-35	55	22 22	M6 10	M8 40	50	1.2	92	7630	1,84	12,2	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
						25 24	M8 25	M10 72											+1.5 -0,7	
-28	94	160	14-38	12-44	65	33 30	M8 25	M12 125	59	2	110	6030	2,94	28,8	160	50 - 130	65 - 150	0.11	+1.8 -0,7	0.9
-38	119	185	18-45	30-50	80	36 35	M10 49	M12 125	67	2	122	4980	5,8	92	325	60 - 200	150 - 300	0.12	+2.0 -1.0	0.9
-42	129	215	22-50	25-65	95	36 35	M10 49	M12 125	76	2	143	4440	9,47	190	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9




Material	collet clamp: aluminium spider element: polyurethane 98 Sh A (red)
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 120 °C

Safety Coupling

with outer cone and keyway

optional
nickel-plated version
optional full stainless
steel version

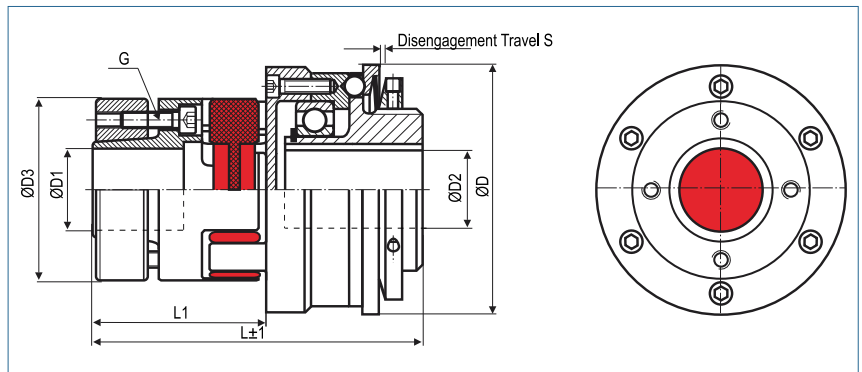

Order Code

KBK/EAP - 24 - 98.5 - 16H7 - N15H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range
C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)								Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	G	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw ISO4762 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	63	6-14	6-13	30	M3	32	0.7	11690	0.26	0.6	12.5	3 - 7	5 - 10	0.09	+1.0	0.9
		58	10#			1.34	27									-0.5	
-19	64	81	10-19	10-16	40	M4	41	1.2	8950	0.71	2.9	17	5 - 15	10 - 30	0.06	+1.2	0.9
		76	13#			2.9	36									-0.5	
-24	79	98.5	15-28	15-24	55	M5	50	1.2	7630	1.45	8.9	60	12 - 35	20 - 60	0.10	+1.4	0.9
		91.5	18#			6	43									-0.5	
-28	94	121	19-38	19-29	65	M5	59	2	6030	2.4	21	160	50 - 130	65 - 150	0.11	+1.5	0.9
		114	30#			6	52									-0.7	
-38	119	135	20-45	20-42	80	M6	67	2	4980	4.6	69	325	60 - 200	150 - 300	0.12	+1.8	0.9
		126	37#			10	58									-0.7	
-42	129	157	28-50	20-50	95	M8	76	2	4440	8.9	158	450	80 - 250	200 - 500	0.14	+2.0	0.9
		145.5	41#			35	64									-1.0	




Material	collet clamp: aluminium outer cone: steel spider element: polyurethane 98 Sh A (red)
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 90 °C

Safety Coupling

with outer cone and collet clamp

optional
nickel-plated version
optional full stainless
steel version

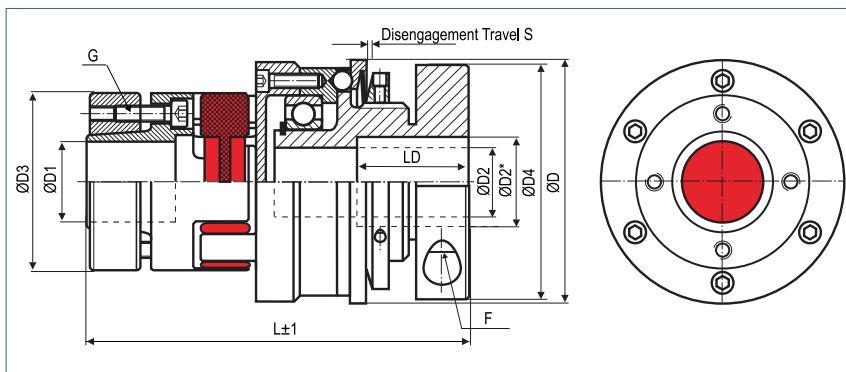

Order Code

KBK/EAK - 24 - 126.5 - 16H7 - 14H7 - 20Nm - C or D - 2

Type

Size

Length

ØD1
(H7)

ØD2
(H7)

Disengagement
Torque

Torque
Range

C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)										Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	Ø D4	G	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min-max	Bore Size (H7) min-max			Screw ISO4762 TA (Nm)	Screw ISO4762 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	73 68	6-14 10#	6-16 11#	30	40.5	M3 1.34	M4 5	32 27	0.7	11690	0.29	0.7	12.5	3 - 7	5 - 10	0.09	+1.0 -0.5	0.9
-19	64	100 95	10-19 13#	10-20 14#	40	56	M4 2.9	M6 15	41 36	1.2	8950	0.85	3.5	17	5 - 15	10 - 30	0.06	+1.2 -0.5	0.9
-24	79	126.5 119.5	15-25 18#	12-28 21#	55	66	M5 6	M8 36	50 43	1.2	7630	1.67	10.2	60	12 - 35	20 - 60	0.10	+1.4 -0.5	0.9
-28	94	142 135	19-38 30#	14-35 27#	65	82	M5 6	M10 72	59 52	2	6030	3.4	30	160	50 - 130	65 - 150	0.11	+1.5 -0.7	0.9
-38	119	160 151	20-45 37#	30-50 41#	80	110	M6 10	M12 125	67 58	2	4980	6.5	98	325	60 - 200	150 - 300	0.12	+1.8 -0.7	0.9
-42	129	195 183	28-50 41#	35-56 46#	95	122	M8 35	M12 125	76 64	2	4440	11.5	204	450	80 - 250	200 - 500	0.14	+2.0 -1.0	0.9




Bore	> Ø D2 and ≤ D2* only over LD
Material	collet clamp: aluminium outer cone: steel spider element: polyurethane 98 Sh A (red)
Keyway	optional acc. DIN 6885 biggest bore marked with a #
Temperature Range	-30 °C ~ 90 °C

Size	14	19	24	28	38	42
D2*	20	26	31	38	57	62
LD	20	28	38	34	42	56

Safety Coupling

with outer cone and inner cone

optional
nickel-plated version
optional full stainless
steel version

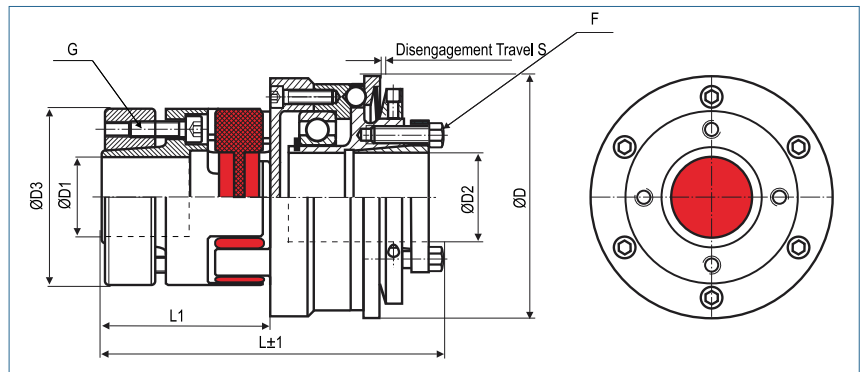

Order Code

KBK/EAI - 24 - 111.5 - 16H7 - 15H7 - 20Nm - C or D - 2

Type Size Length ØD1 (H7) ØD2 (H7) Disengagement Torque Torque Range
C = Single Position D = Multi Position Engagement

Size	Dimensions (mm)									Technical Data								
	ØD	L	Ø D1	Ø D2	Ø D3	G	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw ISO4762 TA (Nm)	Screw ISO4017 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	73	6-14	6-14	30	M3	M3	32	0.7	11690	0.29	0.7	12.5	3 - 7	5 - 10	0.09	+1.0	0.9
		68	10#	10#		1.34	2.1	27								-0.5		
-19	64	93	10-19	12-20	40	M4	M5	41	1.2	8950	0.80	3.3	17	5 - 15	10 - 30	0.06	+1.2	0.9
		88	13#	14#		2.9	6	36								-0.5		
-24	79	111.5	15-25	15-25	55	M5	M6	50	1.2	7630	1.63	10	60	12 - 35	20 - 60	0.10	+1.4	0.9
		104.5	18#	18#		6	8.5	43								-0.5		
-28	94	135	19-38	20-35	65	M5	M6	59	2	6030	2.7	24	160	50 - 130	65 - 150	0.11	+1.5	0.9
		128	30#	27#		6	14	52								-0.7		
-38	119	152	20-45	25-45	80	M6	M8	67	2	4980	5.4	81	325	60 - 200	150 - 300	0.12	+1.8	0.9
		143	37#	37#		10	20	58								-0.7		
-42	129	175	28-50	35-55	95	M8	M8	76	2	4440	9.7	173	450	80 - 250	200 - 500	0.14	+2.0	0.9
		163.5	42#	45#		35	26	64								-1.0		



Material
inner cone: steel
collet clamp: aluminium
outer cone: steel
spider element: polyurethane 98 Sh A (red)


Keyway
optional acc. DIN 6885
biggest bore marked with a #

Temperature Range
-30 °C ~ 90 °C

Safety Coupling

with two outer cones

optional
nickel-plated version
optional full stainless
steel version

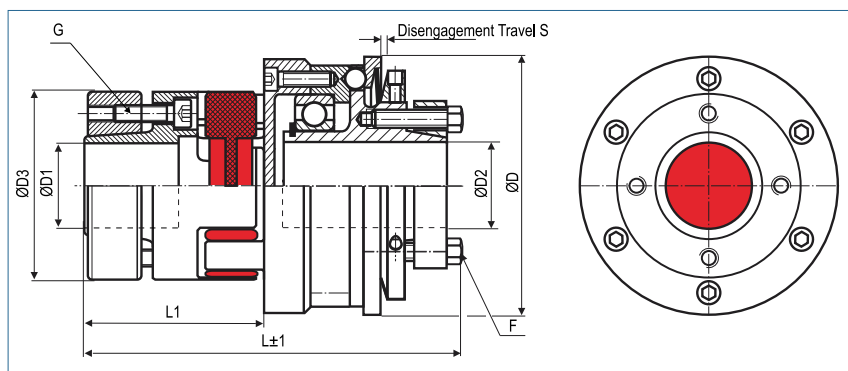

Order Code

KBK/EAA - 24 - 119.5 - 16H7 - 15H7 - 20Nm - C or D - 2

Type	Size	Length	ØD1 (H7)	ØD2 (H7)	Disengagement Torque	Torque Range
					C = Single Position D = Multi Position Engagement	

Size	Dimensions (mm)										Technical Data							
	ØD	L	Ø D1	Ø D2	Ø D3	G	F	L1	S	max. speed (1/min)	Mass (kg)	Moment of Inertia J (kg cm ²)	Torque 98 Sh TKN (Nm)	Torque Range		Misalignment		
	Outer Ø	Length	Bore Size (H7) min~max	Bore Size (H7) min~max		Screw ISO4762 TA (Nm)	Screw ISO4017 TA (Nm)							1 TKN (Nm)	2 TKN (Nm)	radial Δ Kr (mm)	axial Δ Ka (mm)	angular Δ Kw (°)
-14	49	75	6-14	5-14	30	M3	M3	32	0.7	11690	0.29	0.7	12.5	3 - 7	5 - 10	0.09	+1.0	0.9
		70	10#	10#		1.34	2.1	27									-0.5	
-19	64	96	10-19	12-20	40	M4	M5	41	1.2	8950	0.79	3.2	17	5 - 15	10 - 30	0.06	+1.2	0.9
		91	13#	14#		2.9	6	36									-0.5	
-24	79	119.5	15-28	15-25	55	M5	M5	50	1.2	7630	1.62	9.9	60	12 - 35	20 - 60	0.10	+1.4	0.9
		112.5	21#	18#		6	8.7	43									-0.5	
-28	94	143.5	19-38	20-35	65	M5	M6	59	2	6030	2.8	24	160	50 - 130	65 - 150	0.11	+1.5	0.9
		136.5	30#	27#		6	15	52									-0.7	
-38	119	160	20-45	25-50	80	M6	M8	67	2	4980	5.3	79	325	60 - 200	150 - 300	0.12	+1.8	0.9
		151	37#	42#		10	25	58									-0.7	
-42	129	189	28-50	35-55	95	M8	M8	76	2	4440	9.8	174	450	80 - 250	200 - 500	0.14	+2.0	0.9
		177.5	42#	45#		35	36	64									-1.0	



Material

outer cone: steel
outer cone: steel
spider element: polyurethane 98 Sh A (red)

Keyway


optional acc. DIN 6885
biggest bore marked with a #

Temperature Range

-30 °C ~ 90 °C

Spider Elements for Couplings Type KBE

Type KBE series


80 ShoreA

operating temperature:
-50 to +80

peak temperature: -60 to +120

92 ShoreA

operating temperature:
-30 to +90

peak temperature: -50 to +120

98 ShoreA

operating temperature:
-30 to +90

peak temperature: -40 to +120

64 ShoreD

operating temperature:
-20 to +110

peak temperature: -30 to +120

Size	Hardness	Torque [Nm]		Torsional Stiffness Static [Nm/rad]	Torsional Stiffness Dynamic [Nm/rad]	Spring Stiffness radial [N/mm]	Misalignment			max. Bore [mm]
		TK nom.	TK max				axial [mm]	radial [mm]	angular [Grad]	
5	92 ShA	0.5	0.6	5.16	16	154	+0.4 / -0.2	0.06	1.0°	3
7	80 ShA	0.7	1.4	8.6	26	114	+0.6 / -0.3	0.15	1.1°	3
	92 ShA	1.2	2.4	14.3	43	219	+0.6 / -0.3	0.10	1.0°	
	98 ShA	2	4	22.9	69	421	+0.6 / -0.3	0.10	1.0°	
	64 ShD	2.4	4.8	34.3	103	630	+0.6 / -0.3	0.04	0.8°	
9	80 ShA	1.8	3.6	17.2	52	125	+0.8 / -0.4	0.2	1.1°	7
	92 ShA	3	6	31.5	95	262	+0.8 / -0.4	0.15	1.0°	
	98 ShA	5	10	51.6	155	518	+0.8 / -0.4	0.1	0.9°	
	64 ShD	6	12	74.6	224	739	+0.8 / -0.4	0.05	0.8°	
12	80 ShA	3	6	84.3	252	274	+0.9 / -0.4	0.20	1.1°	8
	92 ShA	5	10	160.4	482	470	+0.9 / -0.4	0.14	1.0°	
	98 ShA	9	18	240.7	718	846	+0.9 / -0.4	0.08	0.9°	
	64 ShD	12	24	327.9	982	1198	+0.9 / -0.4	0.05	0.8°	
14	80 ShA	4	8	60.2	180	153	+1.0 / -0.5	0.21	1.1°	10
	92 ShA	7.5	15	114.6	344	336	+1.0 / -0.5	0.15	1.0°	
	98 ShA	12.5	25	171.9	513	654	+1.0 / -0.5	0.09	0.9°	
	64 ShD	16	32	234.2	702	856	+1.0 / -0.5	0.06	0.8°	
19	80 ShA	6	12	618	1065	582	+1.2 / -0.5	0.15	1.1°	18
	92 ShA	12	24	1090	1815	1120	+1.2 / -0.5	0.10	1.0°	
	98 ShA	21	42	1512	2540	2010	+1.2 / -0.5	0.06	0.9°	
	64 ShD	26	52	2560	3810	2930	+1.2 / -0.5	0.04	0.8°	
24	80 ShA	17	34	860	1390	840	+1.4 / -0.5	0.2	1.0°	27
	92 ShA	35	70	2300	5130	1900	+1.4 / -0.5	0.15	1.0°	
	98 ShA	60	120	3700	8130	2940	+1.4 / -0.5	0.11	0.9°	
	64 ShD	75	150	5030	11500	4200	+1.4 / -0.5	0.08	0.8°	
28	80 ShA	46	92	1370	2350	990	+1.5 / -0.7	0.2	1.3°	30
	92 ShA	95	190	4080	6745	1780	+1.5 / -0.7	0.15	1.0°	
	98 ShA	160	320	6410	9920	3200	+1.5 / -0.7	0.11	0.9°	
	64 ShD	200	400	10260	20177	4348	+1.5 / -0.7	0.08	0.8°	
38	92 ShA	190	380	6525	12000	2350	+1.8 / -0.7	0.17	1.0°	38
	98 ShA	325	650	11800	21850	4400	+1.8 / -0.7	0.12	0.9°	
	64 ShD	405	810	26300	40335	6474	+1.8 / -0.7	0.09	0.8°	
42	92 ShA	265	530	10870	20500	4100	+2.0 / -1.0	0.19	1.0°	46
	98 ShA	450	900	21594	37692	5940	+2.0 / -1.0	0.14	0.9°	
	64 ShD	560	1120	36860	71400	7590	+2.0 / -1.0	0.10	0.8°	
48	92 ShA	310	620	12968	22800	4500	+2.1 / -1.0	0.23	1.0°	51
	98 ShA	525	1050	25759	49400	6820	+2.1 / -1.0	0.16	0.9°	
	64 ShD	655	1310	57630	102800	9000	+2.1 / -1.0	0.11	0.8°	

Please contact us for our catalogues
for **SERVO COUPLINGS** and
SHAFT HUB CONNECTIONS



KBK Antriebstechnik GmbH

Unterlandstraße 46

63911 Klingenberg am Main

Germany

Phone: +49 9372 94061-0

Fax: +49 9372 94061-29

info@kbk-antriebstechnik.de

www.kbk-antriebstechnik.de

The details contained in this catalogue are product descriptions based on our knowledge and experience. We reserve the right to make alterations at any time and cannot be responsible for any omissions or printing errors.
02/2019